

October 29, 2021

Doug Eberts
Sierra Resources, Inc.
PO Box 2788
Mammoth Lakes, CA 93546-2788

SSID: 02638

Re: Draft Part 70 Permit Renewal / Reevaluation
Barham Ranch Stationary Source

Dear Mr. Eberts:

Enclosed are the three (3) draft Part 70 Permit Renewal / Reevaluation permits for the Barham Ranch Stationary Source. Please carefully review the enclosed documents to ensure that they accurately describe your facility and that the conditions are acceptable to you. Note that your permitted emission limits may, in the future, be used to determine emission fees.

The estimated permit issuance fee based on our analysis to date for these permits can be reviewed in the enclosed Permit Evaluations. The final fee amount due will be specified when the final permits are issued. **Please do not pay this fee now**, as we will invoice you when the final permits are issued.

The draft federal Part 70 reevaluation permits are subject to a 30-day public review. This review period will start after a public notice has been issued on October 29, 2021 on the District website at: <http://www.ourair.org/news/>. Your comments on these draft permits should be provided, in writing, to the District prior to the close of the public review period. We will consider your comments before we issue the final Part 70 reevaluation permits. Please note that copies of each permit and the renewal application have been sent to the USEPA for their 'proposed Part 70 permit' 45 day review, concurrent to the public review.

Please include the facility identification (FID) and permit numbers as shown at the top of this letter on all correspondence regarding this permit. If you have any questions, please contact me at (805) 961-8888.

Sincerely,



William Sarraf, Supervisor
Engineering Division

enc: Draft PT-70/Reeval 15000 - R1
Draft PT-70/Reeval 15001 - R1
Draft PT-70/Reeval 15074 - R1
Draft Permit Evaluation

cc: Blair Lease - Barham Ranch 02637 Project File
Barham/Boyne Leases 03777 Project File
Barham Ranch – IC Engines 11609 Project File
Engr Chron File
21-Day Suspense File
Marianne Strange
James Menno (Cover letter only)

\\sbcapcd.org\shares\groups\engr\wp\oil&gas\gsd\ssid 02638 - purisima hills llc - blair lease\2021 renewal\draft permits\barham ranch pt-70-reeval - draft letter - 9-6-2021.docx



air pollution control district
SANTA BARBARA COUNTY

DRAFT

PERMIT TO OPERATE 15001-R1

and

PART 70 OPERATING PERMIT 15001-R1

**SIERRA RESOURCES - BARHAM RANCH STATIONARY SOURCE
BARHAM/BOYNE LEASE - BARHAM RANCH**

**LOS ALAMOS
SANTA BARBARA COUNTY, CALIFORNIA**

OWNER/OPERATOR

Purissima Hills LLC / Sierra Resources, Inc. (Sierra Resources)

**Santa Barbara County
Air Pollution Control District**

October 2021

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	PURPOSE	1
1.2	STATIONARY SOURCE / FACILITY OVERVIEW	3
1.3	EMISSION SOURCES	4
1.5	OFFSETS/EMISSION REDUCTION CREDIT OVERVIEW	5
1.6	PART 70 OPERATING PERMIT OVERVIEW	5
2.0	PROCESS DESCRIPTION	6
2.1	PROCESS SUMMARY	6
2.2	SUPPORT SYSTEMS	7
2.3	MAINTENANCE/DEGREASING ACTIVITIES	7
2.4	PLANNED PROCESS TURNAROUNDS	7
2.5	OTHER PROCESSES	7
2.6	DETAILED PROCESS EQUIPMENT LISTING	7
3.0	REGULATORY REVIEW	7
3.1	RULE EXEMPTIONS CLAIMED	7
3.2	COMPLIANCE WITH APPLICABLE FEDERAL RULES AND REGULATIONS	8
3.3	COMPLIANCE WITH APPLICABLE STATE RULES AND REGULATIONS	9
3.4	COMPLIANCE WITH APPLICABLE LOCAL RULES AND REGULATIONS	9
3.5	COMPLIANCE HISTORY	13
4.0	ENGINEERING ANALYSIS	17
4.1	GENERAL	17
4.2	EXTERNAL COMBUSTION EQUIPMENT	17
4.4	FUGITIVE HYDROCARBON SOURCES	18
4.5	TANKS/VESSELS/SUMPS/SEPARATORS	19
4.6	LOADING RACK	19
4.7	VAPOR RECOVERY/CONTROL SYSTEMS	19
4.8	OTHER EMISSION SOURCES	19
4.9	BACT/NSPS/NESHAP/MACT	20
4.10	CEMS/PROCESS MONITORING/CAM	20
4.11	SOURCE TESTING/SAMPLING	20
4.12	PART 70 ENGINEERING REVIEW: HAZARDOUS AIR POLLUTANT EMISSIONS	22
5.0	EMISSIONS	22
5.1	GENERAL	22
5.2	PERMITTED EMISSION LIMITS - EMISSION UNITS	22
5.3	PERMITTED EMISSION LIMITS - FACILITY TOTALS	23
5.4	PART 70: FEDERAL POTENTIAL TO EMIT FOR THE FACILITY	24
5.5	PART 70: HAZARDOUS AIR POLLUTANT EMISSIONS FOR THE FACILITY	24
5.6	EXEMPT EMISSION SOURCES	24
6.0	AIR QUALITY IMPACT ANALYSES	32
6.1	MODELING	32
6.2	INCREMENTS	32
6.3	MONITORING	32
6.4	HEALTH RISK ASSESSMENT	32
7.0	CAP CONSISTENCY, OFFSET REQUIREMENTS AND ERCS	32
7.1	GENERAL	32
7.2	CLEAN AIR PLAN	32
7.3	OFFSET REQUIREMENTS	33

8.0	LEAD AGENCY PERMIT CONSISTENCY	33
9.0	PERMIT CONDITIONS	33
9.A	STANDARD ADMINISTRATIVE CONDITIONS	34
9.B.	GENERIC CONDITIONS	40
9.C	REQUIREMENTS AND EQUIPMENT SPECIFIC CONDITIONS.....	42

LIST OF ATTACHMENTS

10.0	ATTACHMENTS
10.1	Emission Calculation Documentation
10.2	Emission Calculation Spreadsheets
10.3	IDS Database Emission Tables
10.4	Equipment List
10.5	Well List
10.6	Insignificant Activities
10.7	Fee Statement

LIST OF FIGURES AND TABLES

	Page Number
FIGURE 1.1 - LOCATION MAP FOR THE BARHAM/BOYNE LEASE	2
TABLE 3.1 - GENERIC FEDERALLY-ENFORCEABLE DISTRICT RULES	14
TABLE 3.2 - UNIT-SPECIFIC FEDERALLY-ENFORCEABLE DISTRICT RULES.....	16
TABLE 3.3 - NON-FEDERALLY-ENFORCEABLE DISTRICT RULES	16
TABLE 5.1-1 - OPERATING EQUIPMENT DESCRIPTION	25
TABLE 5.1-2 - EMISSION FACTORS	26
TABLE 5.1-3 - HOURLY AND DAILY EMISSION LIMITS BY EMISSION UNIT	27
TABLE 5.1-4 - QUARTERLY AND ANNUAL EMISSION LIMITS BY EMISSION UNIT	28
TABLE 5.2 - TOTAL PERMITTED FACILITY EMISSIONS	29
TABLE 5.3 - FEDERAL POTENTIAL TO EMIT.....	29
TABLE 5.4-1 - EQUIPMENT HAP EMISSION FACTORS.....	30
TABLE 5.4-1 - DAILY AND ANNUAL HAP EMISSIONS.....	30

ABBREVIATIONS/ACRONYMS

AP-42	USEPA's <i>Compilation of Emission Factors</i>
API	American Petroleum Institute
ASTM	American Society for Testing Materials
BACT	Best Available Control Technology
BOEM	Bureau of Ocean Energy Management
bpd	barrels per day (1 barrel = 42 gallons)
CAM	compliance assurance monitoring
CEMS	continuous emissions monitoring
District	Santa Barbara County Air Pollution Control District
dscf	dry standard cubic foot
EU	emission unit
°F	degree Fahrenheit
gal	gallon
gr	grain
HAP	hazardous air pollutant (as defined by CAAA, Section 112(b))
H ₂ S	hydrogen sulfide
I&M	inspection & maintenance
k	kilo (thousand)
l	liter
lb	pound
lbs/day	pounds per day
lbs/hr	pounds per hour
LACT	Lease Automatic Custody Transfer
LPG	liquid petroleum gas
M	mega (million)
MACT	Maximum Achievable Control Technology
MM	million
MW	molecular weight
NG	natural gas
NSPS	New Source Performance Standards
O ₂	oxygen
OCS	outer continental shelf
ppm (vd or w)	parts per million (volume dry or weight)
psia	pounds per square inch absolute
psig	pounds per square inch gauge
PRD	pressure relief device
PTO	Permit to Operate
RACT	Reasonably Available Control Technology
ROC	reactive organic compounds, same as "VOC" as used in this permit
RVP	Reid vapor pressure
scf	standard cubic foot
scfd (or scfm)	standard cubic feet per day (or per minute)
SIP	State Implementation Plan
STP	standard temperature (60°F) and pressure (29.92 inches of mercury)
THC	Total hydrocarbons
tpy, TPY	tons per year
TVP	true vapor pressure
USEPA	United States Environmental Protection Agency
VE	visible emissions
VRS	vapor recovery system

1.0 Introduction

1.1 Purpose


General: The Santa Barbara County Air Pollution Control District (District) is responsible for implementing all applicable federal, state and local air pollution requirements that affect any stationary source of air pollution in Santa Barbara County. The federal requirements include regulations listed in the Code of Federal Regulations: 40 CFR Parts 50, 51, 52, 55, 61, 63, 68, 70 and 82. The State regulations may be found in the California Health & Safety Code, Division 26, Section 39000 et seq. The applicable local regulations can be found in the District's Rules and Regulations. This is a combined permitting action that covers both the Federal Part 70 permit (*Part 70 Operating Permit 15001*) as well as the State Operating Permit (*Permit to Operate 15001*). Santa Barbara County is designated as a non-attainment area for the state PM₁₀ ambient air quality standard. As of July 1, 2020, the County achieved attainment status for the ozone state ambient air quality standards.

Part 70 Permitting: The initial Part 70 permit for this facility was issued on August 31, 2018 in accordance with the requirements of the District's Part 70 operating permit program. This permit is the first renewal of the Part 70 permit, and may include additional applicable requirements and associated compliance assurance conditions.. The Barham/Boyne Lease is a part of the Sierra Resources Barham Ranch Stationary Source, which is a major source for ROC and CO emissions. Conditions listed in this permit are based on federal, state or local rules and requirements. Sections 9.A, 9.B and 9.C of this permit are enforceable by the District, the USEPA and the public since these sections are federally-enforceable under Part 70. Where any reference contained in Sections 9.A, 9.B or 9.C refers to any other part of this permit, that part of the permit referred to is federally-enforceable. Permit conditions listed in Section 9.D are "District-only" enforceable.

Pursuant to the stated aims of Title V of the CAAA of 1990 (i.e., the Part 70 operating permit program), this permit has been designed to meet two objectives. First, compliance with all conditions in this permit would ensure compliance with all federally-enforceable requirements for the facility. Next, the permit would be a comprehensive document to be used as a reference by the permittee, the regulatory agencies and the public to assess compliance.

This reevaluation incorporates greenhouse gas emission calculations for the stationary source. On January 20, 2011, the District revised Rule 1301 to include greenhouse gases (GHGs) that are "subject to regulation" in the definition of "Regulated Air Pollutants". District Part 70 operating permits incorporate the revised definition.

Figure 1.1 - Location Map for the Barham/Boyne Lease

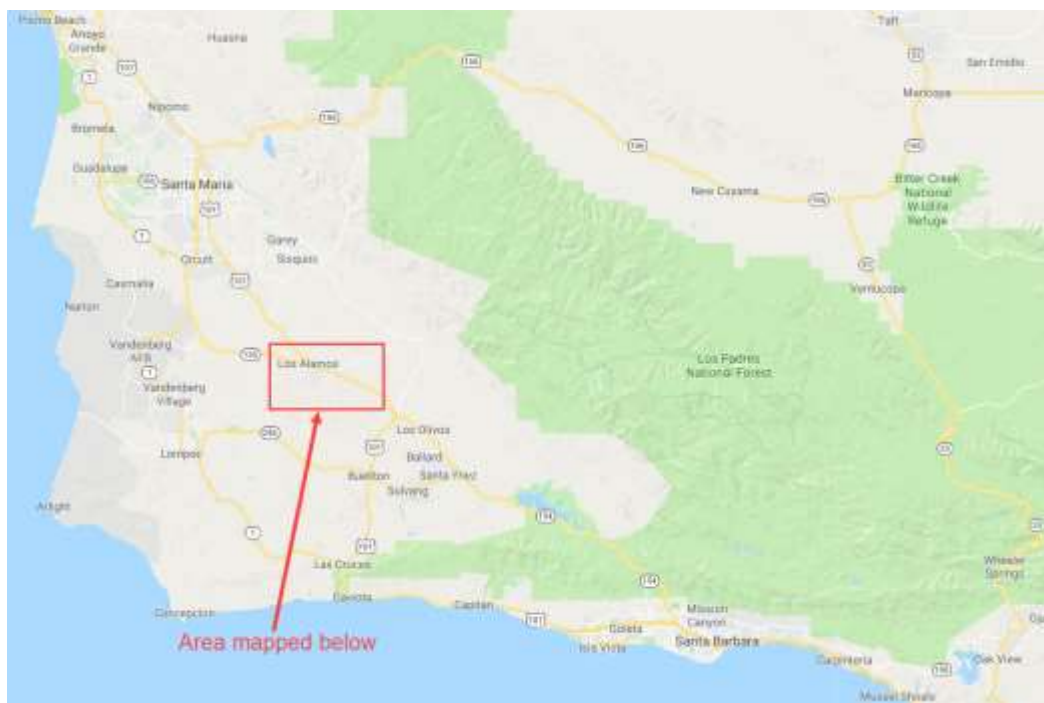

1.2 Stationary Source / Facility Overview

1.2.1 General Overview: Purisima Hills LLC is the sole owner and Sierra Resources, Inc. is the operator of the Barham Ranch Stationary Source located in the city of Los Alamos, an unincorporated area of Santa Barbara County at is 9500 US Highway 101. For District regulatory purposes, it is in the Northern Zone of Santa Barbara County¹. Figure 1.1 shows the location of the facility. The Barham Ranch Stationary Source became a Pt70 source as a result of a District determination in February 2017 that the Blair and the Barham/Boyne Leases comprised a single stationary source. The Barham Ranch Stationary Source (SSID 2638) was constructed in the early 1990s and is comprised of the following facilities:

- Blair Lease (FID 2637)
- Barham/Boyne Leases (FID 3777)
- IC Engines (FID 11609)

The Barham/Boyne Lease consists of the following oil and gas production systems:

- Oil and Gas Wells
- Oil/water/gas Separation System
- Oil and Water Storage System
- Produced Gas Flaring System
- Vapor Recovery System
- Oil Shipping System
- Wastewater Treatment System

There are seventeen (17) oil and gas wells located at the Barham/Boyne Lease. Several wells are equipped with downhole pumps driven by either an internal combustion engine or an electric motor to enhance well productivity. The engines driving these pumps are permitted under Pt70 PTO 15074. Produced well fluids are processed through gas/liquid separators then enter a heated wash tank. Crude oil is sent to crude oil storage tanks then trucked offsite and produced gas is burned in the flare. Produced water is treated in wastewater tanks and trucked offsite. The tanks are connected to a vapor recovery system. Vapors collected by the vapor recovery unit are burned the flare.

1.2.2 Facility Permitting History: The following permits have been issued for this facility:

PERMIT	FINAL ISSUED	PERMIT DESCRIPTION
ATC 7494	2/15/1989	ATC for a new oil and gas facility
PTO 7494	8/14/1990	PTO for a new oil and gas facility
ATC 8540	7/8/1991	ATC for wells and processing equipment
ATC 8269	1/3/1991	ATC for wells and processing equipment
PTO 8269	9/4/1991	PTO for wells and processing equipment
PTO 8269 R1	6/1/1995	Permit Reevaluation
PTO 8269 R2	12/30/1997	Permit Reevaluation
ATC/PTO 9747	8/18/1997	Return Well Cellars to Service
PTO 8269 R3	10/27/2000	Permit Reevaluation
PTO 8269 R4	9/16/2003	Permit Reevaluation
PTO 8269 R5	9/5/2006	Permit Reevaluation

¹ District Rule 102, Definition: "Northern Zone"

PERMIT	FINAL ISSUED	PERMIT DESCRIPTION
PTO 8269 R6	2/17/2010	Permit Reevaluation
PTO 8269 R7	12/12/2012	Permit Reevaluation
PTO 8269 R8	9/30/2015	Permit Reevaluation
ATC/PTO 10968	4/16/2003	Install Well Otec #1
ATC 11978	4/20/2006	Install a Wash Tank.
ATC 12243	10/17/2007	Install a 3.5 MMBtu/hr Boiler
PTO 12243	6/9/2009	Operate a 3.5 MMBtu/hr Boiler
ATC 13868	11/5/2012	Install Well Barham #9
ATC 13869	11/5/2012	Install Well Barham #11
ATC 14762	6/15/2016	Wastewater tank
ATC 15220	10/29/2018	Install a backup VRU
ATC 15315	7/24/2019	Correct Boiler Emission Factors
PTO 15220	9/24/2019	Operate a Backup VRU
PTO 15315	3/5/2020	Operate a Boiler

1.3 **Emission Sources**

The emissions at the Barham/Boyne Lease include oil and gas wells and their associated cellars, oil/water/gas separation equipment, production flare, tank heater, boiler, tanks and fugitive emission components such as valves and flanges. Section 4 of the permit provides the District's engineering analysis of these emission sources. Section 5 of the permit describes the allowable emissions from each permitted emissions unit and also lists the potential emissions from non-permitted emission units.

The emission sources include:

- Seventeen (17) oil and gas wells and well cellars
- Three (3) crude shipping tank
- One (1) wastewater tank
- One (1) wash tank
- One production flare
- One tank heater
- Hot water boiler
- Crude oil loading rack
- Fugitive emission components in gas/liquid hydrocarbon service

A list of all permitted equipment is provided in Section 10.4.

1.4 **Emission Control Overview**

The emission controls employed at this facility include:

- A Fugitive Inspection & Maintenance program for detecting and repairing leaks of hydrocarbons from piping components, i.e., valves, flanges and seals, consistent with the requirements of the District Rule 331 to reduce ROC emissions by approximately 80-percent.
- The boiler is equipped with a low-NOx burner.
- A vapor recovery/gas collection (VRGC) system to collect reactive organic vapors from the gas/liquid separators and the tanks.

- A program to keep well cellars pumped out consistent with the requirements of District Rule 344.
- The flare is equipped with the technology standards required by Rule 359.

1.5 Offsets/Emission Reduction Credit Overview

The Barham Ranch Stationary Source exceeds the offset thresholds of Regulation VIII for NO_x and ROC emissions, however, this is a result of the District determination that the Barham/Boyne and Barham/Boyne leases comprise a single stationary source. There have been no New Source Review permit actions which have required emission offsets since this determination was made, therefore no emission offsets are required for the emissions associated with this permit.

1.6 Part 70 Operating Permit Overview

- 1.6.1 Federally-enforceable Requirements: All federally-enforceable requirements are listed in 40 CFR Part 70.2 (*Definitions*) under “applicable requirements”. These include all SIP-approved District Rules, all conditions in the District-issued Authority to Construct permits, and all conditions applicable to major sources under federally promulgated rules and regulations. All these requirements are enforceable by the public under CAAA. (*See Tables 3.1 and 3.2 for a list of federally-enforceable requirements*)
- 1.6.2 Insignificant Emissions Units: Insignificant emission units are defined under District Rule 1301 as any regulated air pollutant emitted from the unit, excluding HAPs, that are less than 2 tons per year based on the unit’s potential to emit and any HAP regulated under section 112(g) of the Clean Air Act that does not exceed 0.5 ton per year based on the unit’s potential to emit. Insignificant activities were listed in the Part 70 permit application. See Attachment 10.6 for a list of insignificant emissions units.
- 1.6.3 Federal Potential to Emit: The federal potential to emit (PTE) of a stationary source does not include fugitive emissions of any pollutant, unless the source is: (1) subject to a federal NSPS/NESHAP requirement which was in effect as of August 7, 1980, or (2) included in the 29-category source list specified in 40 CFR 51.166 or 52.21. The federal PTE does include all emissions from any insignificant emissions units. See Section 5.4 for the federal PTE for this source.
- 1.6.4 Permit Shield: The operator of a major source may be granted a shield: (a) specifically stipulating any federally-enforceable conditions that are no longer applicable to the source and (b) stating the reasons for such non-applicability. The permit shield must be based on a request from the source and its detailed review by the District. Permit shields cannot be indiscriminately granted with respect to all federal requirements. Sierra Resources has not made a request for a permit shield.
- 1.6.5 Alternate Operating Scenarios: A major source may be permitted to operate under different operating scenarios, if appropriate descriptions of such scenarios are included in its Part 70 permit application and if such operations are allowed under federally-enforceable rules. Sierra Resources made no request for permitted alternative operating scenarios.
- 1.6.6 Compliance Certification: Part 70 permit holders must certify compliance with all applicable federally-enforceable requirements including permit conditions. Such certification must accompany each Part 70 permit application and be re-submitted annually on the anniversary date

of the permit or on a more frequent schedule specified in the permit. A “responsible official” of the owner/operator company signs each certification whose name and address is listed prominently in the Part 70 permit. (*see Section 1.6.9 below*)

- 1.6.7 Permit Reopening: Part 70 permits are re-opened and revised if the source becomes subject to a new rule or new permit conditions are necessary to ensure compliance with existing rules. The permits are also re-opened if they contain a material mistake or the emission limitations or other conditions are based on inaccurate permit application data.
- 1.6.8 Hazardous Air Pollutants (HAPs): Part 70 permits also regulate emission of HAPs from major sources through the imposition of maximum achievable control technology (MACT), where applicable. The federal PTE for HAP emissions from a source is computed to determine MACT or any other rule applicability. The Barham Ranch Stationary Source is not considered a major source of HAPs. (*see Sections 4.12 and 5.5*)
- 1.6.9 Responsible Officials: The designated responsible official is:

Mr. Doug Eberts, Chief Financial Officer
Sierra Resources, Inc.
P. O. Box 2788
Mammoth Lakes, CA 93546

2.0 Process Description

2.1 Process Summary

- 2.1.1 Crude Oil Production and Separation: Oil, water, and gas are produced from wells located on the Barham/Boyne leases. The wells are equipped with well cellars. Several wells are equipped with downhole pumps driven by either an internal combustion engine or an electric motor to enhance well productivity. The engines are permitted under a separate permit. Produced well fluids are piped to a central processing facility where they enter a three-phase separator. The separated liquids are piped to the heater treater for further separation. Fluids are piped from the heater treater to either the wash tank or one of three crude storage tanks. A boiler is used to heat the wash tank fluids to aid separation and to lower the viscosity of the oil prior to shipping. Produced water is sent to the wastewater storage tank. The wastewater collected from the tanks is removed from the property by the use of the wastewater loading rack. Gas collected from the separator and the heater treater is metered and then burned as fuel in the internal combustion engines, the heater treater, or the boiler. Gas collected by the casing head gas collection system and the vapor recovery system is burned in the flare.
- 2.1.2 Gas, Oil, and Water Separation: Produced oil, water and gas are processed through gas/liquid separators then transferred to a heated wash tank. The oil is sent to the crude oil storage tanks and produced gas is burned in the tank heater or flared in the production flare. Produced water is sent to the wastewater tank.
- 2.1.3 Vapor Recovery: The tanks are connected to a vapor recovery system (VRS). The VRS is equipped with a compressor driven by a 15 hp electric motor. A second, identical electric motor-driven vapor recovery unit compressor serves as a backup to the primary compressor.

2.1.4 Crude Oil Shipping: Oil from the crude storage tank is shipped offsite by tanker truck via the crude oil loading rack.

2.1.5 Wastewater Disposal: Produced water is shipped offsite by tanker truck.

2.2 Support Systems

There are no additional support systems on the Barham/Boyne Lease.

2.3 Maintenance/Degreasing Activities

2.3.1 Paints and Coatings: Intermittent surface coating operations are conducted throughout the facility for occasional structural and equipment maintenance needs, including architectural coating. Normally only touch-up and equipment labeling or tagging is performed. All architectural coatings used are in compliance with District Rule 323, as verified through the rule-required recordkeeping.

2.3.2 Solvent Usage: Solvents not used for surface coating thinning may be used on the Barham/Boyne Lease for daily operations. Usage includes cold solvent degreasing and wipe cleaning with rags.

2.4 Planned Process Turnarounds

Maintenance of critical components is carried out according to the requirements of Rule 331 (*Fugitive Emissions Inspection and Maintenance*) during turnarounds. Sierra Resources did not list any emissions from planned process turnarounds.

2.5 Other Processes

2.5.1 Unplanned Activities/Emissions: Sierra Resources does not anticipate or foresee any circumstances that would require special equipment use and result in excess emissions.

2.6 Detailed Process Equipment Listing

Refer to Attachment 10.4 for a complete listing of all permitted equipment.

3.0 Regulatory Review

This Section identifies the federal, state and local rules and regulations applicable to the Barham/Boyne Lease.

3.1 Rule Exemptions Claimed

District Rule 202 Exemptions to Rule 201: Sierra Resources has requested the following exemptions under this rule. An exemption from permit, however, does not necessarily grant relief from any applicable prohibitory rule. The District approved the following exemptions:

- Abrasive Blasting Unit (Rule 202.H.3)
- Storage of Drums of Lubrication Oils (Rule 202.V.3)
- Storage of various types of oils with Initial Boiling Point 300° F or greater (Rule 202.V.1)
- Painting and Solvent Use for Maintenance Activities (Rule 202.D.8)

3.2 Compliance with Applicable Federal Rules and Regulations

- 3.2.1 40 CFR Parts 51/52 {New Source Review (Nonattainment Area Review and Prevention of Significant Deterioration)}: Compliance with District Regulation VIII (*New Source Review*), ensures that future modifications to the facility will comply with these regulations.
- 3.2.2 40 CFR Part 60 {New Source Performance Standards}: The crude oil storage tanks at the Barham/Boyne Lease are not subject to this subpart because they have a design volume less than 1,589.874 m³ (10,000 bbls) and are located prior to custody transfer.
- 3.2.3 40 CFR Part 61 {NESHAP}: This facility is not currently subject to the provisions of this Subpart.
- 3.2.4 40 CFR Part 63 {MACT}: On June 17, 1999, EPA promulgated Subpart HH, a National Emission Standards for Hazardous Air Pollutants (NESHAPS) for Oil and Natural Gas Production and Natural Gas Transmission and Storage. The stationary source is not considered a major source of HAPS, therefore the only affected source (equipment) subject to requirements of this subpart for area sources are triethylene glycol (TEG) dehydration units per section 63.760(b)(2). Since there are no TEG units at this facility, the facility is not subject to this MACT per section 63.760(d).
- 3.2.5 40 CFR Part 64 {Compliance Assurance Monitoring}: This rule became effective on April 22, 1998 and affects emission units at the source subject to a federally enforceable emission limit or standard that use a control device to comply with the emission standard, and either pre-control or post-control emissions exceed the Part 70 source emission thresholds. Compliance with this rule was evaluated and it was determined that no emission units at this facility are currently subject to CAM.
- 3.2.6 Subpart ZZZZ {NESHAP - Stationary Internal Combustion Engines}: There are no emission units on this permit subject to this MACT.
- 3.2.7 Subpart DDDDD {Industrial/Commercial/Institutional Boilers and Process Heaters}: The external combustion equipment associated with this source is not subject to this MACT.
- 3.2.8 Subpart EEEE {Organic Liquid Distribution}: There are no emission units on this permit subject to this MACT.
- 3.2.9 40 CFR Part 70 {Operating Permits}: This subpart is applicable to the Barham/Boyne Lease. Table 3.1 lists the federally-enforceable District promulgated rules that are “generic” and apply to the Barham/Boyne Lease. Table 3.2 lists the federally-enforceable District promulgated rules that are “unit-specific” that apply to the Barham/Boyne Lease. These tables are based on data available from the District’s administrative files and from the Part 70 Operating Permit application.

In its Part 70 permit application (Form I) Sierra Resources certified compliance with all existing District rules and permit conditions. This certification is also required of Sierra Resources semi-annually. Issuance of this permit and compliance with all its terms and conditions will ensure that Sierra Resources complies with the provisions of all applicable subparts.

3.3 Compliance with Applicable State Rules and Regulations

- 3.3.1 Division 26: Air Resources {California Health & Safety Code}: The administrative provisions of the Health & Safety Code apply to this facility and will be enforced by the District. These provisions are District-enforceable only.
- 3.3.2 California Administrative Code Title 17: These sections specify the standards by which abrasive blasting activities are governed throughout the State. All abrasive blasting activities at the Barham/Boyne Lease are required to conform to these standards. Compliance will be assessed through onsite inspections. These standards are District-enforceable only. However, CAC Title 17 does not preempt enforcement of any SIP-approved rule that may be applicable to abrasive blasting activities.
- 3.3.3 Greenhouse Gas Emission Standards for Crude Oil and Natural Gas Facilities (CCR Title 17, Section 95665 et. Seq.): On October 1, 2017, the California Air Resources Board (CARB) finalized this regulation, which establishes greenhouse gas emission standards for onshore and offshore crude oil and natural gas production facilities. This facility is subject to the provisions of this regulation. The separators and tanks at this facility satisfy the requirements of the CARB regulation through the use of a vapor collection system. The reciprocating natural gas compressors at this facility satisfy the requirements of the CARB regulation through the implementation of leak detection and repair (LDAR) on the rod packing/seals pursuant to District Rule 331. This facility is exempt from the leak detection and repair (LDAR) requirements of the CARB regulation per Section 95669(b)(1), which exempts components, including components found on tanks, separators, wells and pressure vessels, that are subject to District Rule 331 LDAR requirements prior to January 1, 2018. This facility does not utilize circulation tanks for well stimulation treatments, centrifugal natural gas compressors, natural gas powered pneumatic devices or pumps, natural gas only wells, or well casing vents, and is therefore not subject to the CARB regulation standards and requirements for these equipment and processes.

3.4 Compliance with Applicable Local Rules and Regulations

- 3.4.1 Applicability Tables: In addition to Tables 3.1 and 3.2, Table 3.3 lists the non-federally-enforceable District promulgated rules that apply to the Barham/Boyne Lease.
- 3.4.2 Rules Requiring Further Discussion: This section provides a detailed discussion regarding the applicability and compliance of certain rules. The following is a rule-by-rule evaluation of compliance for this facility:

District Rule 210 - Fees: Pursuant to Rule 201.G, District permits are reevaluated every three years. This includes the re-issuance of the underlying permit to operate. Also included are the PTO fees. The fees for this facility are based on District Rule 210, Fee Schedule A, however, Part 70 specific costs are based on cost reimbursement provisions (Rule 210.C).

District Rule 301 - Circumvention: This rule prohibits the concealment of any activity that would otherwise constitute a violation of Division 26 (Air Resources) of the California H&SC and the District rules and regulations. To the best of the District's knowledge, the permittee is operating in compliance with this rule.

District Rule 302 - Visible Emissions: This rule prohibits the discharge from any single source any air contaminants for which a period or periods aggregating more than three minutes in any one hour which is as dark or darker in shade than a reading of 1 on the Ringlemann Chart or of

such opacity to obscure an observer's view to a degree equal to or greater than a reading of 1 on the Ringlemann Chart. All internal combustion engines (ICE) are subject to this rule. The ICEs associated with the Barham Ranch Stationary Source are permitted on Pt70 PTO 15074. The requirement of this rule are addressed in that permit.

District Rule 303 (Nuisance): Rule 303 prohibits any source from discharging such quantities of air contaminants or other material in violation of Section 41700 of the Health and Safety Code which cause injury, detriment, nuisance or annoyance to any considerable number of persons or to the public or which endanger the comfort, repose, health or safety or any such persons or the public or which cause or have a natural tendency to cause injury or damage to business or property. Compliance with this rule is assessed through the District's enforcement staff's complaint response program. Based on the source's location, the potential for public nuisance is small.

District Rule 304 (Particulate Matter - Northern Zone): A person shall not discharge into the atmosphere from any source particulate matter in excess of 0.3 grain per cubic foot of gas at standard conditions.

District Rule 309 - Specific Contaminants: Under Section "A", no source may discharge sulfur compounds and combustion contaminants (particulate matter) in excess of 0.2-percent as SO₂ (by volume) and 0.3 gr/scf (at 12% CO₂) respectively.

District Rule 310 - Odorous Organic Compounds: This rule prohibits the discharge of H₂S and organic sulfides that result in a ground level impact beyond the property boundary in excess of either 0.06 ppmv averaged over 3 minutes and 0.03 ppmv averaged over 1 hour. No measured data exists to confirm compliance with this rule.

District Rule 311 - Sulfur Content of Fuels: This rule limits the sulfur content of fuels combusted on the Barham/Boyne Lease to 0.5-percent (by weight) for liquids fuels and 12.5 gr/100 scf (calculated as H₂S) {or 200 ppmvd} for gaseous fuels.

District Rule 317 - Organic Solvents: This rule sets specific prohibitions against the discharge of emissions of both photochemically and non-photochemically reactive organic solvents (40 lb/day and 3,000 lb/day respectively). Solvents may be used on the lease during normal operations for degreasing by wipe cleaning and for use in paints and coatings in maintenance operations. There is the potential to exceed the limits under Section B.2 during significant surface coating activities. Sierra Resources is required to maintain records to ensure compliance with this rule.

District Rule 321 - Solvent Cleaning Operations: This rule was revised to fulfill the commitment in the Clean Air Plans to implement requirements for solvent cleaning machines and solvent cleaning. The revised rule contains solvent reactive organic compounds (ROCs) content limits, revised requirements for solvent cleaning machines, and sanctioned solvent cleaning devices and methods. These provisions apply to solvent cleaning machines and wipe cleaning.

District Rule 322 - Metal Surface Coating Thinner and Reducer: This rule prohibits the use of photochemically reactive solvents for use as thinners or reducers in metal surface coatings. Sierra Resources will be required to maintain records during maintenance operations to ensure compliance with this rule.

District Rule 323.I - Architectural Coatings: This rule sets standards for the application of surface coatings. The primary coating standard that will apply to the lease is for Industrial Maintenance Coatings which has a limit of 250 grams ROC per liter of coating, as applied. The permittee will be required to comply with the Administrative requirements under Section F for each container on the lease.

District Rule 324 - Disposal and Evaporation of Solvents: This rule prohibits any source from disposing more than one and a half gallons of any photochemically reactive solvent per day by means that will allow the evaporation of the solvent into the atmosphere. Sierra Resources is required to maintain records to ensure compliance with this rule.

District Rule 325 - Crude Oil Production and Separation: This rule, adopted January 25, 1994, applies to equipment used in the production, gathering, storage, processing and separation of crude oil and gas prior to custody transfer. The primary requirements of this rule are under Sections D and E. Section D requires the use of vapor recovery systems on all tanks and vessels, including wastewater tanks, oil/water separators and sumps. Section E requires that all produced gas be controlled at all times, except for wells undergoing routine maintenance. All of the tanks on this lease are all connected to the vapor recovery system. Compliance with Section E is met by directing all produced gas to a flare relief system.

District Rule 326 - Storage of Reactive Organic Liquids: This rule applies to equipment used to store reactive organic compound liquids with a vapor pressure greater than 0.5 psia. The tanks on the Barham/Boyne Lease are subject to Rule 325, and are therefore are not subject to this rule per Section B.1.c.

District Rule 330 - Surface Coating of Metal Parts and Products: This rule sets standards for many types of coatings applied to metal parts and products. In addition to the ROC standards, this rule sets operating standards for application of the coatings, labeling and recordkeeping. Compliance with this rule will be demonstrated through inspections and recordkeeping.

District Rule 331 - Fugitive Emissions Inspection and Maintenance: This rule applies to components in liquid and gaseous hydrocarbon service at oil and gas production fields. Ongoing compliance with the provisions of this rule will be assessed via inspection by District personnel using an organic vapor analyzer, analysis of operator records and the District-approved Fugitive Hydrocarbon Inspection and Maintenance Plan. The Barham/Boyne Lease does not perform any routine venting of hydrocarbons to the atmosphere. All gases routinely vented are directed to the vapor recovery system.

District Rule 342 - Control of Oxides of Nitrogen from Boilers, Steam Generators and Process Heaters: This rule applies to boilers, steam generators and process heaters with rated heat inputs greater than or equal to 5 million Btu per hour used in all industrial, institutional and commercial operations. There are no units subject to this rule on the Barham/Boyne lease.

District Rule 343 - Petroleum Storage Tank Degassing: This rule applies to the degassing of any above-ground tank, reservoir or other container of more than 40,000 gallons capacity containing any organic liquid with a vapor pressure greater than 2.6 psia or between 20,000 gallons and 40,000 gallons capacity containing any organic liquid with a vapor pressure greater than 3.9 psia. This rule is not applicable to the tanks at the Barham/Boyne Lease.

District Rule 344 - Sumps, Pits and Well Cellars: Rule 344 requires controls on sumps and pits subject to the rule and an inspection and maintenance plan for well cellars. There are no sumps or pits at the Barham/Boyne Lease.

District Rule 352 - Natural Gas-Fired Fan-Type Central Furnaces and Small Water Heaters: This rule applies to new water heaters rated less than 75,000 Btu/hr and new fan-type central furnaces. There are no units subject to this rule at the Barham/Boyne Lease.

District Rule 353 - Adhesives and Sealants: This rule is applicable to any person who supplies, sells, offers for sale, manufactures, solicits the application of, or uses adhesives, adhesive bonding primers, adhesive primers, sealants, sealant primers, or any other primers, unless otherwise specifically exempted by this rule. Compliance with this rule will be demonstrated through inspections and recordkeeping.

Rule 359 - Flare and Thermal Oxidizers: This rule applies to the use of flares and thermal oxidizers located at oil and gas production and processing facilities, refineries, transportation facilities, and trade locations. The flare is subject to this rule. The flare is equipped with an auto-igniter and is air-assisted for smokeless operation as required by Rule 359.

Rule 360 – Boilers, Water Heaters, and Process Heaters (0.075 – 2 MMBtu/hr): This rule applies to the any water heater, boiler, steam generator or process heater for use within the District with a rated heat input capacity greater than or equal to 75,000 BTU/hr up to and including 2.00 MMBTU/hr. The 1.37 MMBtu/hr heater treater was installed prior to the rule adoption date and is therefore not subject to this rule.

Rule 361- Boilers, Steam Generators, and Process Heaters (Between 2 – 5 MMBtu/hr): Adopted on January 17, 2008 (Amended June 20, 2019), this rule includes requirements for existing units and new/modified units. Units installed prior to January 17, 2008 are designated as existing units. The 3.500 MMBtu/hr boiler complies with the requirements of this rule.

District Rule 505 - Breakdown Conditions: This rule describes the procedures that Sierra Resources must follow when a breakdown condition occurs to any emissions unit associated with the Barham/Boyne Lease. A breakdown condition is defined as an unforeseeable failure or malfunction of (1) any air pollution control equipment or related operating equipment which causes a violation of an emission limitation or restriction prescribed in the District Rules and Regulations, or by State law, or (2) any in-stack continuous monitoring equipment, provided such failure or malfunction:

- a. Is not the result of neglect or disregard of any air pollution control law or rule or regulation;
- b. Is not the result of an intentional or negligent act or omission on the part of the owner or operator;
- c. Is not the result of improper maintenance;
- d. Does not constitute a nuisance as defined in Section 41700 of the Health and Safety Code;
- e. Is not a recurrent breakdown of the same equipment.

District Rule 810 - Federal Prevention of Significant Deterioration: This rule was adopted January 20, 2011 to incorporate the federal Prevention of Significant Deterioration rule requirements into the District's rules and regulations. Future projects at the facility will be evaluated to determine whether they constitute a new major stationary source or a major modification.

3.5 Compliance History

This section contains a summary of the compliance history for this facility and was obtained from documentation contained in the District's administrative file.

3.5.1 Facility Inspections: Routine facility inspections are conducted annually at this facility. Inspection reports for these inspections were reviewed as part of the issuance of this permit. Notice of Violation 11777 was issued during the August 22, 2019 District inspection. There were no other enforcement actions issued or significant compliance issues encountered during these inspections.

3.5.2 Violations: District records indicate that the following enforcement actions were issued to this facility since issuance of PTO 15001:

NOV NO.	Date Issued	Description
#11777	9/11/2019	Failure to operate the facility without a leak free VRU.
#12080	11/01/2019	Failure to provide notification of stock tank demolition.

3.5.3 Variances: There have been no variances issued to this facility since the last permit reevaluation

3.5.4 Significant Historical Hearing Board Actions: There have been no significant Hearing Board actions since the previous permit reevaluation.

Table 3.1 - Generic Federally-Enforceable District Rules

Generic Requirements	Affected Emission Units	Basis for Applicability	Adoption Date
<u>RULE 101</u> : Compliance by Existing Installations	All emission units	Emission of pollutants	June 21, 2012
<u>RULE 102</u> : Definitions	All emission units	Emission of pollutants	August 25, 2016
<u>RULE 103</u> : Severability	All emission units	Emission of pollutants	October 23, 1978
<u>RULE 201</u> : Permits Required	All emission units	Emission of pollutants	June 19, 2008
<u>RULE 202</u> : Exemptions to Rule 201	Applicable emission units, as listed in form 1302-H of the Part 70 application.	Insignificant activities/emissions, per size/rating/function	August 25, 2016
<u>RULE 203</u> : Transfer	All emission units	Change of ownership	April 17, 1997
<u>RULE 204</u> : Applications	All emission units	Addition of new equipment of modification to existing equipment.	August 25, 2016
<u>RULE 205</u> : Standards for Granting Permits	All emission units	Emission of pollutants	April 17, 1997
<u>RULE 206</u> : Conditional Approval of Authority to Construct or Permit to Operate	All emission units	Applicability of relevant Rules	October 15, 1991
<u>RULE 207</u> : Denial of Applications	All emission units	Applicability of relevant Rules	October 23, 1978
<u>RULE 208</u> : Action on Applications – Time Limits	All emission units. Not applicable to Part 70 permit applications.	Addition of new equipment of modification to existing equipment.	April 17, 1997
<u>RULE 212</u> : Emission Statements	All emission units	Administrative	October 20, 1992
<u>RULE 301</u> : Circumvention	All emission units	Any pollutant emission	October 23, 1978
<u>RULE 302</u> : Visible Emissions	All emission units	Particulate matter emissions	June 1981
<u>RULE 303</u> : Nuisance	All emission units	Emissions that can injure, damage or offend.	June 1981
<u>RULE 304</u> : Particulate Matter – Northern Zone	Each PM Source	Emissions of PM in effluent gas	October 23, 1978
<u>RULE 309</u> : Specific Contaminants	All emission units	Combustion contaminant emission	October 23, 1978
<u>Rule 310</u> : Odorous Organic Sulfides	All emission units	Combustion contaminant emission	October 23, 1978
<u>RULE 311</u> : Sulfur Content of Fuel	All combustion units	Use of fuel containing sulfur	October 23, 1978

Generic Requirements	Affected Emission Units	Basis for Applicability	Adoption Date
<u>RULE 317</u> : Organic Solvents	Emission units using solvents	Solvent used in process operations.	October 23, 1978
<u>RULE 321</u> : Solvent Cleaning Operations	Emission units using solvents.	Solvent used in process operations.	June 21, 2012
<u>RULE 322</u> : Metal Surface Coating Thinner and Reducer	Emission units using solvents.	Solvent used in process operations.	October 23, 1978
<u>RULE 323.1</u> : Architectural Coatings	Paints used in maintenance and surface coating activities.	Application of architectural coatings.	June 19, 2014
<u>RULE 324</u> : Disposal and Evaporation of Solvents	Emission units using solvents.	Solvent used in process operations.	October 23, 1978
<u>RULE 342</u> : Boilers, Steam Generators, and Process Heaters (5 MMBtu/hr and greater)	Control heat inputs greater than or equal to 5 million Btu per hour	Process heaters and steam generators.	June 20, 2019
<u>RULE 353</u> : Adhesives and Sealants	Emission units using adhesives and solvents.	Adhesives and sealants used in process operations.	June 21, 2012
<u>RULE 505.A, B1, D</u> : Breakdown Conditions	All emission units	Breakdowns where permit limits are exceeded or rule requirements are not complied with.	October 23, 1978
<u>RULE 603</u> : Emergency Episode Plans	Stationary sources with PTE greater than 100 tpy	Barham Ranch is a major source.	June 15, 1981
<u>RULE 810</u> : Federal Prevention of Significant Deterioration	New or modified emission units	Major modifications	June 20, 2013
<u>REGULATION VIII</u> : New Source Review	All emission units	Addition of new equipment of modification to existing equipment. Applications to generate ERC Certificates.	August 25, 2016
<u>RULE 901</u> : New Source Performance Standards (NSPS)	All emission units	Applicability standards are specified in each NSPS.	September 20, 2010
<u>RULE 1001</u> : National Emission Standards for Hazardous Air Pollutants (NESHAPS)	All emission units	Applicability standards are specified in each NESHAP.	October 23, 1993
<u>REGULATION XIII (RULES 1301-1305)</u> : Part 70 Operating Permits	All emission units	Barham Ranch is a major source.	January 18, 2001

Table 3.2 - Unit-Specific Federally-Enforceable District Rules

Unit-Specific Requirements	Affected Emission Units	Basis for Applicability	Adoption Date
<u>RULE 325</u> : Crude Oil Production and Separation	Wash tank, crude storage tanks, wastewater tanks	Pre-custody transfer oil service tanks with capacities exceeding exemption limits.	January 18, 2001
<u>RULE 331</u> : Fugitive Emissions Inspection & Maintenance	All components (valves, flanges, seals, compressors and pumps) used to handle oil and gas:	Components emit fugitive ROCs.	Dec 10, 1991
<u>RULE 343</u> : Petroleum Storage Tank Degassing	Wash tank, crude storage tanks, wastewater tanks	Tanks used in storage of organic liquids with vapor pressure > 2.6 psia.	Dec 14, 1993
<u>RULE 344</u> : Petroleum Wells, Sumps and Cellars	Well cellars, sump, wastewater pits	The wells at this facility are equipped with well cellars. Compliance with this rule provides a 70% reduction in well cellar ROC emissions.	Nov 10, 1994
<u>Rule 360</u> : Boilers, Water Heaters, and Process Heaters (0.075 – 2 MMBtu/hr)	Water heaters, boilers, steam generators or process heaters rated input capacity 75,000 - 2.0 MMBtu/hour	Any new equipment item covered by this rule must certify compliance with the rule emission limits.	March 15, 2018
<u>Rule 361</u> : Boilers, Steam Generators, and Process Heaters (Between 2 – 5 MMBtu/hr)	Small boilers, steam generators or process heaters rated input capacity 2.0 -5.0 MMBtu/hour	Existing equipment item covered by this rule.	June 20, 2019

Table 3.3 - Non-Federally-Enforceable District Rules

Requirement	Affected Emission Units	Basis for Applicability	Adoption Date
<u>RULE 210</u> : Fees	All emission units	Administrative	March 17, 2005
<u>RULE 212</u> : <u>Emission Statements</u>	All emission units	Administrative	October 20, 1992
<u>RULE 310</u> : Odorous Organic Sulfides	All emission units	Emission of organic sulfides	October 23, 1978
<u>RULE 361</u> : Small Boilers, Steam Generators, and Process Heaters.	Any boiler, steam generator, and process heater with a rated heat input capacity greater than 2 MMBtu/hr and less than 5 MMBTU/hr.	Any equipment item covered by this rule must comply with the rule emission limits.	January 17, 2008
<u>RULES 501-504</u> : Variance Rules	All emission units	Administrative	October 23, 1978
<u>RULE 505.B2, B3, C, E, F, G</u> : Breakdown Conditions	All emission units	Equipment Malfunctions.	October 23, 1978

Requirement	Affected Emission Units	Basis for Applicability	Adoption Date
<u>RULES 506-519</u> : Variance Rules	All emission units	Administrative	October 23, 1978

4.0 Engineering Analysis

4.1 General

The engineering analyses performed for this permit were limited to the review of:

- facility process flow diagrams
- emission factors and calculation methods for each emissions unit
- rule applicability for each emissions unit and process
- emission control equipment (including RACT, BACT, NSPS, NESHAP, MACT)
- emission source testing, sampling, CEMS, CAM
- process monitors needed to ensure compliance

Unless noted otherwise, default ROC/THC reactivity profiles from the District's document titled "*VOC/ROC Emission Factors and Reactivities for Common Source Types*" dated July 13, 1998 (ver 1.1) was used to determine non-methane, non-ethane fraction of THC.

4.2 External Combustion Equipment

Heater Treater: The heater treater is a 1.37 MMBtu/hr Lo-NO_x unit utilized to heat the fluids to facilitate the separation process. This unit is not subject to any District rule emission limits. The emission factors for all the pollutants, e.g., NO_x, ROC, CO and PM/PM_{10/2.5} are based on USEPA AP-42, Section 1.4, Fifth Edition, November 1995. Sulfur oxide emissions are based on mass balance calculations. The calculation methodology is the same for all the units and follows below (see also Section 10.1):

$$ER = [(EF \times SCFPP \times HHV) \div 10^6]$$

where:

ER =	Emission rate (lb/period)
EF =	Pollutant specific emission factor (lb/MMBtu)
SCFPP =	gas flow rate per operating period (scf/period)
HHV =	gas higher heating values (1050 Btu/scf)

Boiler: The boiler is a 3.50 MMBtu/hr unit equipped with a Power Flame Low NO_x Burner, Model LNICR3-G-25B Serial #110623667 and certified by the manufacturer to meet the 30 ppmv NO_x and 400 ppmv CO emissions standards of Rule 361 Table 1. This unit is used to heat the fluids in the wash tank and is subject to District Rule 361. The emission factors are based on Rule 361 for NO_x and CO; USEPA AP-42 (ref: Table 1.4-2, July 1998) for ROC, PM, PM₁₀ and PM_{2.5}, and mass balance for SO_x. The calculation methodology is the same for all the units and follows below (see also Section 10.1):

$$ER = [(EF \times SCFPP \times HHV) \div 10^6]$$

where:

ER =	Emission rate (lb/period)
------	---------------------------

EF = Pollutant specific emission factor (lb/MMBtu)
 SCFPP = gas flow rate per operating period (scf/period)
 HHV = gas higher heating values (1050 Btu/scf)

4.3 Flare

Production Flare: The smokeless, naturally aspirated flare, is a Kaldair model Indair I-6 is equipped with a continuous pilot and electronic ignition and is rated at 17.50 MMBtu/hr. All produced gas at this facility that is not used as fuel is routed to this flare. Emission factors for NO_x and CO are based on AP-42 Table 13.5-1. The ROC factor is based on the District 2016 Flare Study. SO_x emissions are based on mass balance.

The calculation methodology for the flare is:

$$ER = EF \times FPP \times HHV$$

Where:

ER = Emission rate (lb/unit time period, i.e.: hrs, day, qtr, yr)
 EF = Pollutant specific emission factor (lb/MMBtu)
 FPP = Gas flow rate per operating period (SCF/unit time period)
 HHV = Fuel high heating value (Btu/SCF)

4.4 Fugitive Hydrocarbon Sources

- 4.4.1 Piping Components: Emissions of reactive organic compounds from piping components (e.g., valves and connections), pumps, compressors and pressure relief devices have been quantified using emission factors pursuant to District P&P 6100.061.1996 (*Determination of Fugitive Hydrocarbon Emissions at Oil and Gas Facilities Through the Use of Facility Component Counts - Modified for Revised ROC Definition*). The component leak-path counts used in the calculations are based on a revised and corrected inventory compiled by Sierra Resources and included in a revised and District-approved Fugitive Inspection and Maintenance Plan dated July 2017.

The calculation methodology for the fugitive emissions is:

$$ER = [(EF \times CLP \div 24) \times (1 - CE) \times (HPP)]$$

where: ER = emission rate (lb/period)
 EF = ROC emission factor (lb/clp-day)
 CLP = component leak-path (clp)
 CE = control efficiency
 HPP = operating hours per time period (hrs/period)

An emission control efficiency of 80-percent is credited to all but “unsafe to monitor” components due to the implementation of a District-approved I&M program consistent with Rule 331 requirements. Detailed fugitive emission calculations are attached in Attachment 10.2. Ongoing compliance is determined in the field by inspection with an organic vapor analyzer and verification of operator records.

- 4.2 Well Cellars: The Barham/Boyne Lease is equipped with seventeen (17) well cellars. Well cellar emissions are assumed to be reduced 70-percent for maintaining this equipment consistent with

Rule 344. The emission estimates are based District P&P 6100.060 (*Determination of Fugitive Hydrocarbon Emissions at Oil and Gas Facilities by the CARB/KVB Method - Modified for Revised ROC Definition*). The calculation is:

$$ER = [(EF \times SAREA \div 24) \times (1 - CE) \times (HPP)]$$

where:

E = emission rate (lb/period)
EF = ROC emission factor (lb/ft²-day)
SAREA = unit surface area (ft²)
CE = control efficiency
HPP = operating hours per time period (hrs/period)

Attachment 10.2 contains an emission spreadsheet showing the detailed calculations for the well cellars.

4.5 Tanks/Vessels/Sumps/Separators

4.5.1 Oil-Water Separation and Crude Oil Storage Tanks: The Barham/Boyne Lease utilizes three 1,000 bbl crude storage tanks. The tanks are vertical, cone roofed measuring 21.5 in feet diameter by 16.0 feet high. There is one 1500 bbl heated wash tank that measures 21.0 feet in diameter by 24.0 feet high. All tanks are connected to vapor recovery. Emissions from these tanks are calculated using USEPA AP-42, Chapter 7 - Liquid Storage Tanks (5th Edition, 2/96). Attachment 10.2 contains emission spreadsheets showing the detailed calculations for these tanks.

4.5.2 Waste Water Tanks: The Barham/Boyne Lease uses one fixed roof wastewater tank. The tank is 1,000 bbl capacity and measures 21.0 feet in diameter by 16.0 feet high. The tank is connected to vapor recovery. Emissions from the tank are calculated using the same methodology as pits and sumps and is based on District's P&P 6100.060 (*Calculation of Fugitive Hydrocarbon Emissions at Oil and Gas Facilities by the CARB/KVB Method - Modified for the Revised ROC Definition*). Attachment 10.2 contains an emission spreadsheet showing the detailed calculations for the tanks.

4.6 Loading Rack

4.6.1 Loading Rack: Crude oil is delivered offsite via the crude oil loading rack. The loading rack is powered by a pump associated with the tanker truck and is connected to vapor recovery. Attachment 10.2 contains an emission spreadsheet showing the detailed calculations for the loading rack.

4.7 Vapor Recovery/Control Systems

4.7.1 The vapor recovery system (VRS) collects ROC vapors from the storage tanks and loading rack. It is equipped with a compressor driven by a 15 hp electric motor, and is equipped with a backup compressor. The vapors are collected and routed to the vapor recovery unit flare that is dedicated to the VRU only. Overall ROC control efficiency for the system is assumed to be 95 percent.

4.8 Other Emission Sources

4.8.1 General Solvent Cleaning/Degreasing: Solvent usage (not used as thinners for surface coating) may occur at the facility as part of normal daily operations). The usage includes cold solvent

degreasing. Mass balance emission calculations are used assuming all the solvent used evaporates to the atmosphere. The solvent limits in Table 5.2 cannot be exceeded (excluding solvent activities that qualify for the maintenance exemption under Rule 202).

- 4.8.2 **Surface Coating:** Surface coating operations typically include normal touch up activities. Entire facility painting programs may also be performed. Emissions are determined based on mass balance calculations assuming all solvents evaporate into the atmosphere. Emissions of PM/PM₁₀ from paint overspray are not calculated due to the lack of established calculation techniques.
- 4.8.3 **Abrasive Blasting:** Abrasive blasting with CARB certified sands may be performed as a preparation step prior to surface coating. The engines (ICEs) used to power the compressor may be electric or diesel fired. Any ICE used for this purpose will require a permit unless the engine qualifies for a permit exemption. Particulate matter is emitted during this process. A general emission factor of 0.01 pound PM per pound of abrasive is used (SCAQMD - Permit Processing Manual, 1989) to estimate emissions of PM and PM₁₀ when needed for compliance verifications. A PM/PM₁₀ ratio of 1.0 is assumed.

4.9 BACT/NSPS/NESHAP/MACT

To date, this facility has not triggered Best Available Control Technology (BACT), New Source Performance Standards (NSPS) National Emission Standards for Hazardous Air Pollutants (NESHAP) or Maximum Available Control Technology (MACT).

A National Emission Standards for Hazardous Air Pollutants (NESHAPS) for Oil and Natural Gas Production and Natural Gas Transmission and Storage was promulgated on June 17, 1999. As described in section 3.2.4, this facility is not subject to this MACT.

4.10 CEMS/Process Monitoring/CAM

- 4.10.1 **CEMS:** There are no CEMS at this facility.
- 4.10.2 **Process Monitoring:** In many instances, ongoing compliance beyond a single (snap shot) source test is assessed by the use of process monitoring systems. Examples of these monitors include: engine hour meters, fuel usage meters, water injection mass flow meters, flare gas flow meters and hydrogen sulfide analyzers. It is important that they be well maintained and calibrated to ensure that the required accuracy and precision of the devices are within specifications. Sierra Resources is required to meter oil and gas productions volumes, fuel flows and flare gas volumes.
- 4.10.3 **CAM:** There are no emission units at this facility subject to the USEPA's Compliance Assurance Monitoring Assurance (CAM) rule.

4.11 Source Testing/Sampling

Source testing and sampling are required in order to ensure compliance with permitted emission limits, prohibitory rules, control measures and the assumptions that form the basis for issuing operating permits.

- 4.11.1 **Source Testing.** Source testing of the boiler is required as described in permit condition 9.C.8 and Table 4.11.1 below.

Table 4.11.1 Source Testing Requirements

Emission & Limit Test Points	Pollutants	Parameters	Test Methods ^(a)
External Combustion Unit Stacks (b)(c)(d)(e)	NO _x CO ROC Sampling Point Det. Stack Gas Flow Rate O ₂ , CO ₂ , Dry MW Moisture Content Stack Temperature	ppmv, lb/hr ppmv, lb/hr ppmv, lb/hr °F	EPA Method 7E, ARB 100 EPA Method 10, ARB 100 EPA Method 18 EPA Method 1 EPA Method 2 or 19 EPA Method 3 EPA Method 4 Calibrated Thermocouple
Fuel Gas ^(h)	Fuel Gas Flow Rate Higher Heating Value Total Sulfur Content Gas Composition	Btu/lb ppmw CHONS%, F-factor	Fuel Gas Meter ^(f) ASTM D 1826 or 3588 ASTM D 1072 or 5504 ^(g) ASTM 1945

Notes:

- (a) Alternative methods may be acceptable on a case-by-case basis.
- (b) The emission rates shall be based on EPA Methods 2 and 4, or Method 19 along with the heat input rate.
- (c) For NO_x, CO, and O₂ a minimum of three 15-minute runs shall be obtained during each test. For ROC, one bag sample shall be obtained per run with a minimum sample time of 15 minutes per sample.
- (d) See Tables 1 and 2 for the emission standards to be measured against during the test. Measured NO_x and CO shall not exceed the limit specified in the applicable Rule (e.g., Rule 361, Rule 342).
- (e) All emission determinations shall be made in the as-found operating condition, at the maximum attainable firing rate to be approved by the source test plan. No determination shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer.
- (f) Fuel meter shall meet the calibration requirements prior to testing.
- (g) Fuel gas heating value and composition are optional for Rule 361 applicable units. Sulfur content only required for units not run on utility purchased gas. For units rated at 5 MMBtu/hr or greater, heating value is required in all cases, but gas composition not required if Method 2 is used for stack flow

4.11.2 Sampling. At a minimum, the process streams below are required to be sampled and analyzed on a periodic basis, per District Rules and standards:

Produced oil: Analysis for API gravity and true vapor pressure.

Produced Gas: Monthly analysis of produced gas for hydrogen sulfide (H₂S) content and high heating value.

All sampling and analyses are required to be performed according to District approved procedures and methodologies. Typically, the appropriate ASTM methods are acceptable. For liquids with API gravity over 20, ASTM D323 applies for true vapor pressure (TVP) measurement. In this case, the TVP at the maximum expected temperature shall be calculated

from the Reid vapor pressure in accordance with API Bulletin 2518, or equivalent Reid/true vapor pressure correlation. The calculated true vapor pressure is based on the maximum expected operating temperature in the initial crude oil storage tank. TVP sampling methods for liquids with an API gravity under 20° require specialized procedures per Rule 325.G.2.b. It is important that all sampling and analysis be traceable by chain of custody procedures. H₂S measurements are conducted using colorimetric gas detection tubes.

4.12 Part 70 Engineering Review: Hazardous Air Pollutant Emissions

Hazardous air pollutant emissions from the different categories of emission units at the Barham/Boyer Lease are based on emission factors listed in USEPA AP-42. Where no emission factors are available, the HAP fractions from the ARB VOC Speciation Manual - Second Edition (August 1991) are used in conjunction with the ROC emission factor for the equipment item in question. HAP emission factors are listed in Table 5.4-1. Potential HAP emissions from the facility are computed and listed in Table 5.4-2. These emissions are estimates only. They are not limitations.

5.0 Emissions

5.1 General

The facility was analyzed to determine all air-related emission sources. Emissions calculations are divided into "permitted" and "exempt" categories. District Rule 202 determines permit-exempt equipment. The permitted emissions for each emissions unit is based on the equipment's potential-to-emit (as defined by Rule 102). Since the previous permit reevaluation, PM_{2.5} has been added as a regulated pollutant, therefore PM_{2.5} emissions have been quantified.

Section 5.2 details the permitted emissions for each emissions unit. Section 5.3 details the overall permitted emissions for the facility based on reasonable worst-case scenarios using the potential-to-emit for each emissions unit. Section 5.4 details the federal potential to emit using the definition of potential to emit used in Rule 1301. Section 5.5 addresses the estimated HAP emissions from the facility. Section 5.6 addresses the estimated emissions from permit-exempt equipment and also serves as the Part 70 list of insignificant emissions. Section 5.7 addresses the estimated emissions from greenhouse gases. The District uses a computer database to accurately track the emissions from a facility. Attachment 10.3 contains the District's documentation for the information entered into that database.

5.2 Permitted Emission Limits - Emission Units

Each emissions unit associated with the facility was analyzed to determine the potential-to-emit for the following pollutants:

- Nitrogen Oxides (NO_x)²
- Reactive Organic Compounds (ROC)
- Carbon Monoxide (CO)
- Sulfur Oxides (SO_x)³

² Calculated and reported as nitrogen dioxide (NO₂)

³ Calculated and reported as sulfur dioxide (SO₂)

- Particulate Matter (PM) ⁴
- Particulate Matter smaller than 2.5 microns (PM_{2.5})
- Particulate Matter smaller than 10 microns (PM_{2.5/10})
- Greenhouse Gases (GHG)

Permitted emissions are calculated for both short term (daily) and long term (annual) time periods. Section 4.0 (Engineering Analysis) provides a general discussion of the basic calculation methodologies and emission factors used. The reference documentation for the specific emission calculations, as well as detailed calculation spreadsheets, may be found in Section 4 and Attachments 10.1 and 10.2 respectively. Table 5.1-1 provides the basic operating characteristics. Table 5.1-2 provides the specific emission factors. Tables 5.1-3 and 5.1-4 show the permitted short-term and permitted long-term emissions for each unit or operation. Table 5.2 lists the facility potential to emit and Table 5.3 lists the federal potential to emit. With the exception of fugitive emissions, all emission limits are federally-enforceable.

5.3 Permitted Emission Limits - Facility Totals

The total potential-to-emit for all emission units associated with this facility were analyzed. This analysis looked at the reasonable worst-case operating scenarios for each operating period. The equipment operating in each of the scenarios are presented below. Unless otherwise specified, the operating characteristics defined in Table 5.1-1 for each emission unit are assumed. Table 5.2 shows the total permitted emissions for the facility.

Daily Scenario:

- External combustion units
- Fugitive components
- Crude oil tanks
- Wash tank
- Waste water tanks, sumps and oil/water separators
- Well cellars
- Loading rack
- Flaring
- Solvent usage

Annual Scenario:

- External combustion units
- Fugitive components
- Crude oil tanks
- Wash tank
- Waste water tanks, sumps and oil/water separators
- Well cellars
- Loading rack
- Flaring
- Solvent usage

⁴ Calculated and reported as all particulate matter smaller than 100 µm

5.4 *Part 70: Federal Potential to Emit for the Facility*

Table 5.3 lists the federal Part 70 potential to emit. Coating emissions, although exempt from permit requirements, are included in the federal potential to emit calculation. Fugitive emissions are not included in the federal definition of potential to emit.

5.5 *Part 70: Hazardous Air Pollutant Emissions for the Facility*

Hazardous air pollutants (HAP) emission factors, for each type of emissions unit, are listed in Table 5.4-1. Potential HAP emissions, based on the worst-case scenario, are shown in Table 5.4-2. HAPs emissions from several emission units have been revised based on revised HAPs emission factors.

5.6 *Exempt Emission Sources*

Per Rule 202, maintenance activities such as painting and surface coating qualify for a permit exemption, but may contribute to facility emissions.

5.7 *Greenhouse Gases*

GHG emissions from combustion sources are calculated using emission factors found in Tables C-1 and C-2 of 40 CFR Part 98 and global warming potentials found in Table A-1 of 40 CFR Part 98. The follow emission factors apply. The derivation of these emission factors is provided in Attachment 10.1.

External Combustion: 117.10 lbs/MMBtu as CO₂

Pt70 Permit to Operate 15001-R1
Table 5.1-1. Operating Equipment Description

Equipment Category	Description	APCD Device No.	Device Specifications					Usage Data					Reference		
			Fuel	HHV (Btu/scf)	ppmv S ^(a)	Size	Units	Capacity	Units	Emission Reduction %	hr	day	qtr	year	
Combustion: External	Tank Heater	5144	FG	1050	200	1.37	MMBtu/hr	1.37 MMBtu/hr	--	1.00	24	2190	8760	A	
	Boiler	110245	FG	1050	200	3.50	MMBtu/hr	3.50 MMBtu/hr	--	1.00	24	2190	8760		
	Production Flare	3344	FG	1050	200	17.50	MMBtu/hr	17.50 MMBtu/hr	--	1.00	24	2190	8760		
Fugitive Components (District P&P 6100.060)	Valves/Fittings/Wellheads	3338	--	--	--	Valves and fittings		-- --	80%	1.00	24	2190	8760	B	
Tanks	Crude Stock Tank	3340	--	--	--	21.14' x 16'		1,000 bbl	95%	1.00	24	2190	8760		
	Crude Stock Tank	8492	--	--	--	21.14' x 16'		1,000 bbl	95%	1.00	24	2190	8760		
	Crude Stock Tank	110246	--	--	--	21.14' x 16'		1,000 bbl	95%	1.00	24	2190	8760		
	Wash Tank	107889	--	--	--	21.14' x 24'		1,500 bbl	95%	1.00	24	2190	8760		
	Wastewater Tank	388806	--	--	--	21.4' x 16'		1,000 bbl	95%	1.00	24	2190	8760		
Well Cellars	Well Cellars	6335	--	--	--	424	ft ²		70%	1.00	24	2190	8760		
Loading Rack	Crude Oil Loading Rack	3342	--	--	--	160	bbl/hr		95%	1.00	10	913	3650	F	
Solvents	Cleaning/Degreasing	--	--	--	--	various			--	1.00	24	2190	8760		

Pt70 Permit to Operate 15001-R1
Table 5.1-2. Equipment Emission Factors

Equipment Category	Description	Emission Factors								Reference
		NOx	ROC	CO	SOx	PM	PM _{2.5/10}	GHG	Units	
Combustion: External	Tank Heater	0.098	0.005	0.0824	0.0342	0.008	0.008	117.00	lb/MMBtu	A
	Boiler	0.036	0.005	0.297	0.0342	0.008	0.008	117.00	lb/MMBtu	
	Production Flare	0.068	0.200	0.310	0.0342	0.02	0.02	117.00	lb/MMBtu	
Fugitive Components (District P&P 6100.060)	Valves/Fittings/Wellheads	-	1.310	-	-	-	-	-	lb/day-well	B
Tanks	Crude Stock Tank	See Attachment 10.2		-	-	-	-	-	-	
	Crude Stock Tank	See Attachment 10.2		-	-	-	-	-	-	
	Crude Stock Tank	See Attachment 10.2		-	-	-	-	-	-	
	Wash Tank	See Attachment 10.2		-	-	-	-	-	-	
	Wastewater Tank	See Attachment 10.2		-	-	-	-	-	-	
Well Cellars	Well Cellars	0.0941							lb/ft ² day	
Loading Rack	Crude Oil Loading Rack	1.8050							lb/kgal	F
Solvents	Cleaning/Degreasing	various							lb/gal	

Footnotes:

(a) SOx as SO₂; NOx as NO₂. This applies to all sheets.

Pt70 Permit to Operate 15001-R1
Table 5.1-3. Short Term Emission Limits

Equipment Category	Description	NOx	ROC	CO	SOx	PM	PM _{2.5/10}	GHG
		lb/day	lb/day	lb/day	lb/day	lb/day	lb/day	lb/day
Combustion: External	Tank Heater	3.22	0.16	2.71	1.12	0.26	0.26	3846.96
	Boiler	3.02	0.42	24.95	2.87	0.67	0.67	9828.00
	Production Flare	28.56	84.00	130.20	14.36	8.40	8.40	49140.00
Fugitive Components (District P&P 6100.060)	Valves/Fittings/Wellheads	--	4.73					
Tanks	Crude Stock Tank	--	1.21	--	--	--	--	--
	Crude Stock Tank	--	1.21	--	--	--	--	--
	Crude Stock Tank	--	1.21	--	--	--	--	--
	Wash Tank	--	0.03	--	--	--	--	--
	Wastewater Tank	--	0.22	--	--	--	--	--
Well Cellars	Well Cellars	--	17.88	--	--	--	--	--
Loading Rack	Crude Oil Loading Rack	--	1.07	--	--	--	--	--
Solvents	Cleaning/Degreasing	--	Rule 317 Limits	--	--	--	--	--

Pt70 Permit to Operate 15001-R1
Table 5.1-4. Long Term Emission Limits

Equipment Category	Description	NOx	ROC	CO	SOx	PM	PM _{2.5/10}	GHG
		TPY	TPY	TPY	TPY	TPY	TPY	TPY
Combustion: External	Tank Heater	0.59	0.03	0.49	0.21	0.05	0.05	702.07
	Boiler	0.55	0.08	4.55	0.52	0.12	0.12	1793.61
	Production Flare	5.21	15.33	23.76	2.62	1.53	1.53	8968.05
Fugitive Components (District P&P 6100.060)	Valves/Fittings/Wellheads	--	0.86	--	--	--	--	--
Tanks	Crude Stock Tank	--	0.22	--	--	--	--	--
	Crude Stock Tank	--	0.22	--	--	--	--	--
	Crude Stock Tank	--	0.22	--	--	--	--	--
	Wash Tank	--	0.02	--	--	--	--	--
	Wastewater Tank	--	0.04	--	--	--	--	--
Well Cellars	Well Cellars	--	3.26	--	--	--	--	--
Loading Rack	Crude Oil Loading Rack	--	1.97	--	--	--	--	--
Solvents	Cleaning/Degreasing	--	0.74	--	--	--	--	--

Pt70 Permit to Operate 15001-R1
Table 5.2. Total Facility Permitted Emissions

Daily Emissions							
Equipment Category	NOx	ROC	CO	SOx	PM	PM _{2.5/10}	GHG
External Combustion	34.81	84.58	157.86	18.36	9.34	9.34	62814.96
Fugitive Components - P&P 6100.060	--	4.73	--	--	--	--	--
Tanks	--	3.86	--	--	--	--	--
Well Cellars	--	17.88	--	--	--	--	--
Loading Racks	--	1.07	--	--	--	--	--
Solvents	--	Rule 317 Limits	--	--	--	--	--
Totals (lb/day)	34.81	112.12	157.86	18.36	9.34	9.34	62814.96

Annual Emissions							
Equipment Category	NOx	ROC	CO	SOx	PM	PM _{2.5/10}	GHG
External Combustion	6.35	15.44	28.81	3.35	1.70	1.70	11463.73
Fugitive Components - P&P 6100.060	--	0.86	--	--	--	--	--
Tanks	--	0.73	--	--	--	--	--
Cellars	--	3.26	--	--	--	--	--
Loading Racks	--	0.61	--	--	--	--	--
Solvents	--	0.74	--	--	--	--	--
Totals (TPY)	6.35	20.90	28.81	3.35	1.70	1.70	11463.73

Permit to Operate 15001-R1
Table 5.3. Federal Potential to Emit

A. Daily

Equipment Category	NOx	ROC	CO	SOx	PM	PM ₁₀	GHG
External Combustion	34.81	84.58	157.86	18.36	9.34	9.34	62814.96
Tanks	--	3.64	--	--	--	--	--
Totals (lb/day)	34.81	88.22	157.86	18.36	9.34	9.34	62814.96

B. Annual

Equipment Category	NOx	ROC	CO	SOx	PM	PM ₁₀	GHG
External Combustion	6.35	15.44	28.81	3.35	1.70	1.70	11463.73
Tanks	--	0.69	--	--	--	--	--
Totals (TPY)	6.35	16.13	28.81	3.35	1.70	1.70	11463.73

Table 5.4-1
Barham Ranch Boyne Lease: Permit to Operate 15001-R1
Equipment Hazardous Air Pollutant Factors

[illegible]

References:

¹ VCAPCD AB 2588 Combustion Emission Factors (2001) - Natural Gas Fired External Combustion Equipment (<10 MMBTU/h)

² USEPA, AP-42 Table 1.4-4. Emission Factors for Metals from Natural Gas Combustion

³ VCAPCD AB 2588 Combustion Emission Factors (2001) - Natural Gas Fired External Combustion Equipment (flare)

⁴ USEPA, AP-42 Table 1.4-4, Emission Factors for Metals from Natural Gas Combustion

⁶ The emission factor, originally in units of lb/lb-TOC, was converted to lb/lb-DOC using the DOC/TOC fraction of 0.391 from Table 3.2.3 of the Dist

⁶ The emission factor, originally in units of lb/lb-TOC, was converted to lb/lb-ROC using the District's default ROC/TOC fraction of 0.885 for crude oil.

⁷ The emission factors, originally in units of lb/lb-TOC, were converted

^a Solvents assumed to contain 5% benzene, 5% toluene, 5% xylene.

Notes:-

Notes:

1. The weight fraction for iso-Octane (i.e., 2,2,4-Trimethylpentane) is based on the conservative assumption that all isomers of octane are iso-Octane

Table 5.4-2
Barham Ranch Boyne Lease: Permit to Operate 15001-R1
Annual Hazardous Air Pollution Emissions (TPY)

Equipment Category	Description	APCD Device No.	Heptane	Benzene	Toluene	Xylene	m-Octane	Formaldehyde	PAN (nd no. not shown)	Naphthalene	Acetaldehyde	Acetone	1,3-Butadiene	Carbon Tetrachloride	Dioxin	Ethylbenzene	Ethyl Acrylate	Ethyl Hexachloride	Methoxy	Methylhexachloride	Benzene	Vinyl Chloride	1,1,2,2-Tetrafluoroethane	1,1,2-Trichloroethane	1,2-Dichloropropane	1,3-Dichloropropane	Aroclor	Beryllium	Cadmium	Total Chromium	Cobalt	Manganese	Mercury	Nickel	Selenium	
Combustion: External	Tank Heater	005144	3.60E-05	4.57E-05	2.09E-04	1.55E-04	--	9.72E-05	5.71E-07	1.71E-06	2.48E-05	1.54E-05	--	--	--	--	5.43E-05	--	--	--	--	--	--	--	--	--	1.14E-06	6.88E-08	6.29E-06	8.00E-06	4.80E-07	2.17E-06	1.49E-06	1.20E-05	1.37E-07	
	Boiler	110245	9.20E-05	1.17E-04	5.34E-04	3.97E-04	--	2.48E-04	1.46E-06	4.38E-06	6.28E-05	3.94E-05	--	--	--	--	1.39E-04	--	--	--	--	--	--	--	--	--	2.92E-06	1.75E-07	1.61E-05	2.04E-05	1.23E-06	5.55E-06	3.80E-06	3.07E-05	3.50E-07	
	Production Flare	003344	2.12E-03	1.16E-02	4.23E-03	2.12E-03	--	8.53E-02	2.19E-04	8.03E-04	3.14E-03	7.30E-04	--	--	--	--	1.05E-01	--	--	--	--	--	--	--	--	--	1.46E-05	8.76E-07	8.03E-05	1.02E-04	6.13E-06	2.77E-05	1.90E-05	1.53E-04	1.75E-06	
Fugitive Components	Valves/Fittings/Welheads	003338	1.53E-01	1.54E-03	--	--	1.34E-01	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Tanks	Crude Stock Tank	003340	1.17E-02	5.97E-03	3.48E-03	--	9.94E-04	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
	Crude Stock Tank	003452	1.17E-02	5.97E-03	3.48E-03	--	9.94E-04	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
	Crude Stock Tank	110246	1.17E-02	5.97E-03	3.48E-03	--	9.94E-04	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
	Wash Tank	107889	1.06E-03	5.28E-04	3.30E-04	--	9.90E-05	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
	Wastewater Tank	388806	2.11E-03	1.06E-03	6.60E-04	--	1.98E-04	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Well Cellars	Well Cellars	006335	1.72E-01	8.62E-02	5.38E-02	--	1.62E-02	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Loading Rack	Crude Oil Loading Rack	003342	3.48E-01	3.52E-03	--	--	3.06E-01	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Solvents	Cleaning/Degreasing	--	--	3.70E-02	3.70E-02	3.70E-02	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Total Facility HAPs (TPY):			7.14E-01	1.59E-01	1.07E-01	3.97E-02	4.60E-01	8.57E-02	2.21E-04	8.09E-04	3.23E-03	7.85E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.06E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.87E-05	1.12E-06	1.03E-04	1.31E-04	7.84E-06	3.55E-05	2.43E-05	1.96E-04	2.24E-06

Notes:

1. These are estimates only, and are not intended to represent emission limits.

2. Based on CAAA, Section 112 (n) (4) stipulations, the HAP emissions listed above can not be aggregated at the source for any purpose, including determination of HAP major source status for MACT applicability

3. Natural gas emission calculations are based on a standard value of 1050 BTU/scf.

Sierra Resources Barham Ranch: Permit to Operate 19061-N
 Stationary Source Monitoring Air Pollution Emissions 1977

Facility	Percent of	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480	2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491	2492	2493	2494	2495	2496	2497	2498	2499	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509	2510	2511	2512	2513	2514	2515	2516	2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527	2528	2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539	2540	2541	2542	2543	2544	2545	2546	2547	2548	2549	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569	2570	2571	2572	2573	2574	2575	2576	2577	2578	2579	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589	2590	2591	2592	2593	2594	2595	2596	2597	2598	2599	2600	2601	2602	2603	2604	2605	2606	2607	2608	2609	2610	2611	2612	2613	2614	2615	2616	2617	2618	2619	2620	2621	2622	2623	2624	2625	2626	2627	2628	2629	2630	2631	2632	2633	2634	2635	2636	2637	2638	2639	2640	2641	2642	2643	2644	2645	2646	2647	2648	2649	2650	2651	2652	2653	2654	2655	2656	2657	2658	2659	2660	2661	2662	2663	2664	2665	2666	2667	2668	2669	2670	2671	2672	2673	2674	2675	2676	2677	2678	2679	2680	2681	2682	2683	2684	2685	2686	2687	2688	2689	2690	2691	2692	2693	2694	2695	2696	2697	2698	2699	2700	2701	2702	2703	2704	2705	2706	2707	2708	2709	2710	2711	2712	2713	2714	2715	2716	2717	2718	2719	2720	2721	2722	2723	2724	2725	2726	2727	2728	2729	2730	2731	2732	2733	2734	2735	2736	2737	2738	2739	2740	2741	2742	2743	2744	2745	2746	2747	2748	2749	2750	2751	2752	2753	2754	2755	2756	2757	2758	2759	2760	2761	2762	2763	2764	2765	2766	2767	2768	2769	2770	2771	2772	2773	2774	2775	2776	2777	2778	2779	2780	2781	2782	2783	2784	2785	2786	2787	2788	2789	2790	2791	2792	2793	2794	2795	2796	2797	2798	2799	2800	2801	2802	2803	2804	2805	2806	2807	2808	2809	2810	2811	2812	2813	2814	2815	2816	2817	2818	2819	2820	2821	2822	2823	2824	2825	2826	2827	2828	2829	2830	2831	2832	2833	2834	2835	2836	2837	2838	2839	2840	2841	2842	2843	2844	2845	2846	2847	2848	2849	2850	2851	2852	2853	2854	2855	2856	2857	2858	2859	2860	2861	2862	2863	2864	2865	2866	2867	2868	2869	2870	2871	2872	2873	2874	2875	2876	2877	2878	2879	2880	2881	2882	2883	2884	2885	2886	2887	2888	2889	2890	2891	2892	2893	2894	2895	2896	2897	2898	2899	2900	2901	2902	2903	2904	2905	2906	2907	2908	2909	2910	2911	2912	2913	2914	2915	2916	2917	2918	2919	2920	2921	2922	2923	2924	2925	2926	2927	2928	2929	2930	2931	2932	2933	2934	2935	2936	2937	2938	2939	2940	2941	2942	2943	2944	2945	2946	2947	2948	2949	2950	2951	2952	2953	2954	2955	2956	2957	2958	2959	2960	2961	2962	2963	2964	2965	2966	2967	2968	2969	2970	2971	2972	2973	2974	2975	2976	2977	2978	2979	2980	2981	2982	2983	2984	2985	2986	2987	2988	2989	2990	2991	2992	2993	2994	2995	2996	2997	2998	2999	3000
10001 - 10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	1000																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															

Notes:
1. These are maximum rates and are not intended to represent actual rates.
2. Based on CIMA Section 123 (a) (i) (ii) (iii). The NAF maximum total spend rate will be applicable to the source for all projects, including administration of NAF spent time in office for NAF activities.

6.0 Air Quality Impact Analyses

6.1 Modeling

Air quality modeling has not been required for the Barham/Boyne Lease.

6.2 Increments

An air quality increment analysis has not been required for the Barham/Boyne Lease.

6.3 Monitoring

Air quality monitoring is not required for the Barham/Boyne Lease.

6.4 Health Risk Assessment

The Sierra Resources Barham Ranch Stationary Source is subject to the Air Toxics Hot-Spots Program (AB-2588). A health risk assessment (HRA) for the source was prepared by the District in November 1995 under the requirements of the Air Toxics “Hot Spots” Information and Assessment Act of 1987 (AB 2588). The HRA is based on 1992 toxic emissions inventory data submitted to the District by a previous operator. An earlier HRA, based on 1990 emission data was also prepared by the District for in July 1993. Based on the 1992 toxic emissions inventory, a cancer risk of 3 per million off the property was estimated for the Barham Ranch Stationary Source. Additionally, a chronic risk of 0.05 and an acute risk of 0.04 have been estimated by the District. The cancer and non-cancer chronic risk projections are less than the District’s AB-2588 significance thresholds of 10 in a million and 1.0, respectively.

7.0 CAP Consistency, Offset Requirements and ERCs

7.1 General

Santa Barbara County has not attained the state PM_{10} air quality standards. Therefore, emissions from all emission units at the stationary source and its constituent facilities must be consistent with the provisions of the USEPA and State approved Clean Air Plans (CAP) and must not interfere with progress toward attainment of federal and state ambient air quality standards. Under District regulations, any modifications at the source that result in an emission increase of any nonattainment pollutant exceeding 25 lbs/day must apply BACT (NAR). Increases above offset thresholds will trigger offsets at the source or elsewhere so that there is a net air quality benefit for Santa Barbara County. These offset threshold levels are 240 lbs/day for all attainment pollutants and precursors (except carbon monoxide and $PM_{2.5}$) and 25 tons/year for all non-attainment pollutants and precursors (except carbon monoxide and $PM_{2.5}$).

On July 1, 2020, Santa Barbara County achieved attainment for the State ozone standards. This change was initiated by the California Air Resources Board (CARB) at their December 2019 public hearing and it was later approved by the Office of Administrative Law.

7.2 Clean Air Plan

The 2007 Clean Air Plan, adopted by the District Board on August 16, 2007, addressed both federal and state requirements, serving as the maintenance plan for the federal eight-hour ozone standard and as the state triennial update required by the Health and Safety Code to demonstrate how the District will expedite attainment of the state eight-hour ozone standard. The plan was

developed for Santa Barbara County as required by both the 1998 California Clean Air Act and the 1990 Federal Clean Air Act Amendments.

In December 2019 the District Board adopted the 2019 Ozone Plan. The 2019 Plan provides a three-year update to the 2010 Clean Air Plan. As Santa Barbara County has only recently attained the state eight-hour ozone standard, the 2019 Clean Air Plan demonstrates how the District plans to maintain that standard. The 2019 Clean Air Plan therefore satisfies all state triennial planning requirements.

7.3 Offset Requirements

The Barham Ranch stationary source exceeds the emission offset thresholds of Regulation VIII for NO_x and ROC emissions, however this stationary source did not become subject to the emission offset requirements of Regulation VIII until adoption of revised Rule 802 in August 2016. Since that time, there has been no New Source Review permit actions which have required emission offsets therefore, emission offsets are not required for the emissions associated with this facility or stationary source as of the issuance of this permit.

8.0 Lead Agency Permit Consistency

The Santa Barbara County Planning and Development Department is the lead agency for this project. To the District's knowledge, this permit is consistent with all provisions of the lead agency permit.

9.0 Permit Conditions

This section lists the applicable permit conditions for the Barham/Boyne Lease. Section A lists the standard administrative conditions. Section B lists 'generic' permit conditions, including emission standards, for all equipment in this permit. Section C lists conditions affecting specific equipment. Conditions listed in Sections A, B and C are enforceable by the USEPA, the District, the State of California and the public. Where any reference contained in Sections 9.A, 9.B or 9.C refers to any other part of this permit, that part of the permit referred to is federally-enforceable. In case of a discrepancy between the wording of a condition and the applicable federal or District rule(s), the wording of the rule shall control.

9.A STANDARD ADMINISTRATIVE CONDITIONS.....	35
Condition A.1 Condition Acceptance.....	35
Condition A.2 Grounds for Revocation.....	35
Condition A.3 Access to Records and Facilities.....	35
Condition A.4 Conflicts Between Conditions.....	35
Condition A.5 Compliance.....	35
Condition A.6 Consistency with Analysis.....	35
Condition A.7 Compliance with Permit Conditions.....	35
Condition A.8 Consistency with State and Local Permits.....	36
Condition A.9 Emergency Provisions.....	36
Condition A.10 Compliance Plans.....	36
Condition A.11 Right of Entry.....	36
Condition A.12 Permit Life.....	36
Condition A.13 Reimbursement of Costs.....	37
Condition A.14 Prompt Reporting of Deviations.....	37
Condition A.15 Reporting Requirements/Compliance Certification.....	37
Condition A.16 Federally-Enforceable Conditions.....	37
Condition A.17 Recordkeeping Requirements.....	37
Condition A.18 Conditions for Permit Reopening.....	38
Condition A.19 Emission Factor Revisions.....	38
Condition A.20 Equipment Identification.....	39
Condition A.21 Equipment Maintenance.....	39
Condition A.22 Transfer of Owner/Operator.....	39
9.B GENERIC CONDITIONS.....	39
Condition B.1 Circumvention (Rule 301).....	39
Condition B.2 Visible Emissions (Rule 302).....	39
Condition B.3 Nuisance (Rule 303).....	39
Condition B.4 Specific Contaminants (Rule 309).....	39
Condition B.5 Organic Solvents (Rule 317).....	40
Condition B.6 Metal Surface Coating Thinner and Reducer (Rule 322).....	40
Condition B.7 Architectural Coatings (Rule 323.I).....	40
Condition B.8 Disposal and Evaporation of Solvents (Rule 324).....	40
Condition B.9 Adhesives and Sealants (Rule 353).....	40
Condition B.10 CARB Registered Portable Equipment.....	40
Condition B.11 Emergency Episode Plans.....	40
9.C REQUIREMENTS AND EQUIPMENT SPECIFIC CONDITIONS.....	41
Condition C.1 External Combustion Equipment.....	41
Condition C.2 Storage Tanks.....	43
Condition C.3 Production Flare.....	44
Condition C.4 Fugitive Hydrocarbon Emissions Components.....	46
Condition C.5 Well Cellars.....	47
Condition C.6 Crude Loading Rack.....	48
Condition C.7 Solvent Usage.....	49
Condition C.8 Source Testing.....	49
Condition C.9 Equipment Maintenance.....	50

Condition C.10	Equipment Identification.....	50
Condition C.11	Recordkeeping.....	50
Condition C.12	Requirements for Produced Gas.....	50
Condition C.13	Crude Oil Sampling.....	50
Condition C.14	Semi-Annual Monitoring/Compliance Verification Reports...	50
Condition C.15	Documents Incorporated by Reference.....	52
Condition C.16	External Combustion Units - Permits Required.....	52
Condition C.17	Compliance with Rule 346.....	52
Condition C.18	Compliance with Rule 359.....	52
9.D DISTRICT-ONLY CONDITIONS.....		52
Condition D.1	Solvent Usage.....	52
Condition D.2	GHG Emission Standards for Crude Oil and Gas Facilities.....	53
Condition D.3	CARB GHG Regulation Recordkeeping.....	53
Condition D.4	CARB GHG Regulation Reporting.....	54

9.A **Standard Administrative Conditions**

The following federally-enforceable administrative permit conditions apply to the Barham/Boyne Lease:

- A.1 **Condition Acceptance.** Acceptance of this operating permit by Sierra Resources shall be considered as acceptance of all terms, conditions, and limits of this permit. *[Re: ATC 8269, PTO 8269]*
- A.2 **Grounds for Revocation.** Failure to abide by and faithfully comply with this permit or any Rule, Order, or Regulation may constitute grounds for revocation pursuant to California Health & Safety Code Section 42307 *et seq.* *[Re: ATC 8269, PTO 8269]*
- A.3 **Access to Records and Facilities.** As to any condition that requires for its effective enforcement the inspection of records or facilities by the District or its agents, Sierra Resources shall make such records available or provide access to such facilities upon notice from the District. Access shall mean access consistent with California Health and Safety Code Section 41510 and Clean Air Act Section 114A. *[Re: ATC 8837, PTO 8837]*
- A.4 **Conflicts Between Conditions.** In the event that any condition herein is determined to be in conflict with any other condition contained herein, then, if principles of law do not provide to the contrary, the condition most protective of air quality and public health and safety shall prevail to the extent feasible. *[Re: ATC 8269, PTO 8269]*
- A.5 **Compliance.** Nothing contained within this permit shall be construed to allow the violation of any local, State or Federal rule, regulation, ambient air quality standard or air quality increment. *[Re: ATC 8269, PTO 8269]*
- A.6 **Consistency with Analysis.** Operation under this permit shall be conducted consistent with all data, specifications and assumptions included with the application and supplements thereof (as documented in the District's project file) and the District's analyses under which this permit is issued as documented in the Permit Analyses prepared for and issued with the permit. *[Re: ATC 8269, PTO 8269]*
- A.7 **Compliance with Permit Conditions.**
 - (a) The permittee shall comply with all permit conditions in Sections 9.A, 9.B and 9.C.
 - (b) This permit does not convey property rights or exclusive privilege of any sort.
 - (c) Any permit noncompliance constitutes a violation of the Clean Air Act and is grounds for enforcement action; for permit termination, revocation and re-issuance, or modification; or for denial of a permit renewal application.
 - (d) It shall not be a defense for the permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
 - (e) A pending permit action or notification of anticipated noncompliance does not stay any permit condition.

- (f) Within a reasonable time period, the permittee shall furnish any information requested by the Control Officer, in writing, for the purpose of determining:
 - (i) compliance with the permit, or
 - (ii) whether or not cause exists to modify, revoke and reissue, or terminate a permit or for an enforcement action.
 - (g) In the event that any condition herein is determined to be in conflict with any other condition contained herein, then, if principles of law do not provide to the contrary, the condition most protective of air quality and public health and safety shall prevail to the extent feasible. *[Re: 40 CFR Part 70.6, District Rules 1303.D.1]*
- A.8 **Consistency with State and Local Permits.** Nothing in this permit shall relax any air pollution control requirement imposed on the Barham Ranch Stationary Source by the State of California or the California Coastal Commission in any consistency determination for this project with the California Coastal Act.
- A.9 **Emergency Provisions.** The permittee shall comply with the requirements of the District, Rule 505 (Upset/Breakdown rule) and/or District Rule 1303.F, whichever is applicable to the emergency situation. In order to maintain an affirmative defense under Rule 1303.F, the permittee shall provide the District, in writing, a “notice of emergency” within 2 working days of the emergency. The “notice of emergency” shall contain the information/documentation listed in Sections (1) through (5) of Rule 1303.F. *[Re: 40 CFR 70.6, District Rule 1303.F]*
- A.10 **Compliance Plans.**
- (a) The permittee shall comply with all federally enforceable requirements that become applicable during the permit term in a timely manner.
 - (b) For all applicable equipment, the permittee shall implement and comply with any specific compliance plan required under any federally-enforceable rules or standards. *[Re: District Rule 1302.D.2]*
- A.11 **Right of Entry.** The Regional Administrator of USEPA, the Control Officer, or their authorized representatives, upon the presentation of credentials, shall be permitted to enter upon the premises where a Part 70 Source is located or where records must be kept:
- (a) To inspect the stationary source, including monitoring and control equipment, work practices, operations, and emission-related activity;
 - (b) To inspect and duplicate, at reasonable times, records required by this Permit to Operate;
 - (c) To sample substances or monitor emissions from the source or assess other parameters to assure compliance with the permit or applicable requirements, at reasonable times. Monitoring of emissions can include source testing. *[Re: District Rule 1303.D.2]*

- A.12 **Permit Life.** The Part 70 permit shall become invalid three years from the date of issuance unless a timely and complete renewal application is submitted to the District. Any operation of the source to which this Part 70 permit is issued beyond the expiration date of this Part 70 permit and without a valid Part 70 operating permit (or a complete Part 70 permit renewal application) shall be a violation of the CAAA, § 502(a) and 503(d) and of the District rules. The permittee shall apply for renewal of the Part 70 permit no later than 180 days before the permit expiration date. Upon submittal of a timely and complete renewal application, the Part 70 permit shall remain in effect until the Control Officer issues or denies the renewal application. *[Re: District Rule 1304.D.1]*
- A.13 **Reimbursement of Costs.** All reasonable expenses, as defined in District Rule 210, incurred by the District, District contractors, and legal counsel for all activities that follow the issuance of this permit, including but not limited to permit condition implementation, compliance verification and emergency response, directly and necessarily related to enforcement of the permit shall be reimbursed by Sierra Resources as required by Rule 210. *[Re: District Rules 1303.D.1 and 1304.D.11, 40 CFR 70.6]*
- A.14 **Prompt Reporting of Deviations.** The permittee shall submit a written report to the District documenting each and every deviation from the requirements of this permit or any applicable federal requirements within 7-days after discovery of the violation, but not later than 180-days after the date of occurrence. The report shall clearly document 1) the probable cause and extent of the deviation, 2) equipment involved, 3) the quantity of excess pollutant emissions, if any, and 4) actions taken to correct the deviation. The requirements of this condition shall not apply to deviations reported to District in accordance with Rule 505. *Breakdown Conditions*, or Rule 1303.F *Emergency Provisions*. *[District Rule 1303.D.1, 40 CFR 70.6(a) (3)]*
- A.15 **Reporting Requirements/Compliance Certification.** The permittee shall submit compliance certification reports to the USEPA and the Control Officer every six-months. A paper copy, as well as, a complete PDF electronic copy of these reports, shall be in a format approved by the District. These reports shall be submitted on District forms and shall identify each applicable requirement/condition of the permit, the compliance status with each requirement/condition, the monitoring methods used to determine compliance, whether the compliance was continuous or intermittent, and include detailed information on the occurrence and correction of any deviations (excluding emergency upsets) from permit requirement. The reporting periods shall be each half of the calendar year, e.g., January through June for the first half of the year. A paper copy, as well as, a complete PDF electronic copy of these reports, shall be submitted by September 1st and March 1st, respectively, each year. Supporting monitoring data shall be submitted in accordance with the “Semi-Annual Compliance Verification Report” condition in section 9.C. The permittee shall include a written statement from the responsible official, which certifies the truth, accuracy, and completeness of the reports. *[Re: District Rules 1303.D.1, 1302.D.3, 1303.2.c]*
- A.16 **Federally-Enforceable Conditions.** Each federally-enforceable condition in this permit shall be enforceable by the USEPA and members of the public. None of the conditions in the District-only enforceable section of this permit are federally-enforceable or subject to the public/USEPA review. *[Re: CAAA, § 502(b)(6), 40 CFR 70.6]*
- A.17 **Recordkeeping Requirements.** Records of required monitoring information shall include the following:
- (a) The date, place as defined in the permit, and time of sampling or measurements

- (b) The date(s) analyses were performed
- (c) The company or entity that performed the analyses
- (d) The analytical techniques or methods used
- (e) The results of such analyses
- (f) The operating conditions as existing at the time of sampling or measurement

The records (electronic or hard copy), as well as all supporting information including calibration and maintenance records, shall be maintained for a minimum of five (5) years from date of initial entry by Sierra Resources and shall be made available to the District upon request. *[Re: District Rule 1303.D.1.f, 40CFR70.6(a)(3)(ii)(A)]*

A.18 **Conditions for Permit Reopening.** The permit shall be reopened and revised for cause under any of the following circumstances:

- (a) Additional Requirements: If additional applicable requirements (e.g., NSPS or MACT) become applicable to the source which has an unexpired permit term of three (3) or more years, the permit shall be reopened. Such a reopening shall be completed no later than 18 months after promulgation of the applicable requirement. However, no such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended. All such re-openings shall be initiated only after a 30-day notice of intent to reopen the permit has been provided to the permittee, except that a shorter notice may be given in case of an emergency.
- (b) Inaccurate Permit Provisions: If the District or the USEPA determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emission standards or other terms or conditions of the permit, the permit shall be reopened. Such re-openings shall be made as soon as practicable.
- (c) Applicable Requirement: If the District or the USEPA determines that the permit must be revised or revoked to assure compliance with any applicable requirement including a federally-enforceable requirement, the permit shall be reopened. Such re-openings shall be made as soon as practicable.

Administrative procedures to reopen and revise/revoke/reissue a permit shall follow the same procedures as apply to initial permit issuance. Re-openings shall affect only those parts of the permit for which cause to reopen exists.

If a permit is reopened, the expiration date does not change. Thus, if the permit is reopened, and revised, then it will be reissued with the expiration date applicable to the re-opened permit. *[Re: 40 CFR 70.7, 40 CFR 70.6]*

- A.19 **Emission Factor Revisions.** The District may update the emission factors for any calculation based on USEPA AP-42 or District P&P emission factors at the next permit modification or permit reevaluation to account for USEPA and/or District revisions to the underlying emission factors. Further, Sierra Resources shall modify its permit via an ATC application if compliance data shows that an emission factor used to develop the permit's potential to emit is lower than that documented in the field. The ATC permit shall, at a minimum, adjust the emission factor to that documented by the compliance data consistent with applicable rules, regulations and requirements. *[Re: ATC 8269, PTO 8269]*
- A.20 **Equipment Identification.** Identifying tag(s) or name plate(s) shall be displayed on the equipment to show manufacturer, model number, and serial number. The tag(s) or plate(s) shall be issued by the manufacturer and shall be affixed to the equipment in a permanent and conspicuous position.
- A.21 **Equipment Maintenance.** The equipment listed in this permit shall be properly maintained and kept in good condition at all times. The equipment manufacturer's maintenance manual, maintenance procedures and/or maintenance checklists (if any) shall be kept on site.
- A.22 **Transfer of Owner/Operator.** This permit is only valid for the owner and operator listed on this permit unless a *Transfer of Owner/Operator* application has been applied for and received by the District. Any transfer of ownership or change in operator shall be done in a manner as specified in District Rule 203. District Form –01T and the appropriate filing fee shall be submitted to the District within 30 days of the transfer.

9.B. Generic Conditions

The generic conditions listed below apply to all emission units, regardless of their category or emission rates. These conditions are federally enforceable. Compliance with these requirements is discussed in Section 3. In case of a discrepancy between the wording of a condition and the applicable federal or District rule(s), the wording of the rule shall control.

- B.1 **Circumvention (Rule 301).** A person shall not build, erect, install, or use any article, machine, equipment or other contrivance, the use of which, without resulting in a reduction in the total release of air contaminants to the atmosphere, reduces or conceals an emission which would otherwise constitute a violation of Division 26 (Air Resources) of the Health and Safety Code of the State of California or of these Rules and Regulations. This Rule shall not apply to cases in which the only violation involved is of Section 41700 of the Health and Safety Code of the State of California, or of District Rule 303. *[Re: District Rule 301]*
- B.2 **Visible Emissions (Rule 302).** Sierra Resources shall not discharge into the atmosphere from any single source of emission any air contaminants for a period or periods aggregating more than three minutes in any one hour that is:
- (a) As dark or darker in shade as that designated as No. 1 on the Ringlemann Chart, as published by the United States Bureau of Mines, or
 - (b) Of such opacity as to obscure an observer's view to a degree equal to or greater than does smoke described in subsection B.2(a) above. *[Re: District Rule 302]*

- (c) Sierra Resources shall determine compliance with the requirements of this Condition and Rule 302. *[Re: District Rule 302]*
- B.3 **Nuisance (Rule 303).** No pollutant emissions from any source at Sierra Resources shall create nuisance conditions. Operations shall not endanger health, safety or comfort, nor shall they damage any property or business. *[Re: District Rule 303]*
- B.4 **Specific Contaminants (Rule 309).** Sierra Resources shall not discharge into the atmosphere from any single source sulfur compounds and combustion contaminants (particulate matter) in excess of the applicable standards listed in Sections A through E of Rule 309. *[Re: District Rule 309]*
- B.5 **Organic Solvents (Rule 317).** Sierra Resources shall comply with the emission standards listed in Rule 317.B. Compliance with this condition shall be based on Sierra Resource's compliance with Condition C.7 of this permit. *[Re: District Rule 317]*
- B.6 **Metal Surface Coating Thinner and Reducer (Rule 322).** The use of photochemically reactive solvents as thinners or reducers in metal surface coatings is prohibited. Compliance with this condition shall be based on Sierra Resource's compliance with Condition C.7 of this permit and facility inspections. *[Re: District Rule 322]*
- B.7 **Architectural Coatings (Rule 323.1).** Sierra Resources shall comply with the rule requirements for any architectural coating that is supplied, sold, offered for sale, or manufactured for use within the District. *[Re: District Rules 323, 317, 322, 324]*
- B.8 **Disposal and Evaporation of Solvents (Rule 324).** Sierra Resources shall not dispose through atmospheric evaporation of more than one and a half gallons of any photochemically reactive solvent per day. Compliance with this condition shall be based on Sierra Resource's compliance with Condition C.7 of this permit and facility inspections. *[Re: District Rule 324]*
- B.9 **Adhesives and Sealants (Rule 353).** Sierra Resources shall not use adhesives, adhesive bonding primers, adhesive primers, sealants, sealant primers, or any other primers, unless the permittee complies with the following:
- (a) Such materials used are purchased or supplied by the manufacturer or suppliers in containers of 16 fluid ounces or less; or alternately
 - (b) When Sierra Resources uses such materials from containers larger than 16 fluid ounces and the materials are not exempt by Rule 353.B.1, the total reactive organic compound emissions from the use of such material shall not exceed 200 pounds per year unless the substances used and the operational methods comply with Sections D, E, F, G, and H of Rule 353. Compliance shall be demonstrated by recordkeeping in accordance with Section B.2 and/or Section O of Rule 353. *[Re: District Rule 353]*
- B.10 **CARB Registered Portable Equipment.** State registered portable equipment shall comply with State registration requirements. A copy of the state registration shall be readily available whenever the equipment is at the facility. *[Re: District Rule 202]*
- B.11 **Emergency Episode Plan (Rule 603).** During emergency episodes, Sierra Resources shall implement the Emergency Episode Plan approved on December 12, 2000.

9.C Requirements and Equipment Specific Conditions

This section contains non-generic federally-enforceable conditions, including emissions and operations limits, monitoring, recordkeeping, and reporting for each specific equipment group. This section may also contain other non-generic conditions.

- C.1 **External Combustion Equipment.** The following equipment items are included in this emissions unit category:

Device #	Name and Description
005144	Heater Treater, field gas-fired: 1.370 MMBtu/hr heat input
110245	Boiler, field gas-fired: 3.500 MMBtu/hr heat input

- (a) Emission Limits: Mass emissions from the equipment listed in this permit condition shall not exceed the emission limits listed in Tables 5.1-3 and 5.1-4. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.

- (i) *Boiler Oxides of Nitrogen (NO_x) and CO Concentration Emissions Limits.*
Emissions of NO_x (as NO₂) from the boiler shall not exceed 30 ppmvd NO_x @ 3% O₂ or 400 ppmvd CO @ 3% O₂.

- (b) Operational Limits: The following additional operational limits apply:

- (i) The heat input to the heater treater and boiler shall not exceed the following limits. These limits are based on the design rating of these units. Unless otherwise designated by the Control Officer, the following fuel heat content shall be used for determining compliance: Natural gas = 1,050 Btu/scf

	MMbtu/hr	MMbtu/day	MMBtu/yr
Heater Treater	1.370	32.880	12,001.000
Boiler	3.5000	84.000	30,660.000

- (ii) New/Modified Units Rated Between 2.0 - 5.0 MMBtu/hr Not Fired on Utility Natural Gas. Any owner or operator of any unit not fired exclusively on utility natural gas shall perform District-approved source testing not less than once every 24 months using the source test methods listed in Section H of Rule 361. After the third required compliance source test, the District may, at its discretion, allow the owner or operator of the unit to perform tune-ups in lieu of source testing per the requirements of Section G.
- (iii) *Rule 361 Non-Operational Test Firing.* No tune-up is required during a calendar year for any unit subject to Rule 361 that is not operated during that calendar year. This unit may be test fired to verify availability of the unit for its intended use but once test firing is completed it shall be shutdown. If test firing exceeds 24 hours per year, then tune-ups shall follow the requirements of Rule 361.G.1.

- (iv) The heater treater and boiler shall be fired on the field-gas produced at this lease. The concentration of sulfur compounds (calculated as H₂S at standard conditions, 60°F and 14.7 psia) in fuel burned in this unit shall not exceed 9.43 grains per 100 cubic feet (200 ppmvd).
- (c) Monitoring: The following monitoring conditions apply:
 - (i) The permittee shall monitor fuel usage for all external combustion equipment (boilers and heater treaters) at the Barham Ranch Stationary Source in accordance with the District approved *Fuel Gas Monitoring Plan*.
 - (ii) The H₂S content of the fuel gas shall be measured on a quarterly basis using colorimetric gas detection tubes or a District-approved equivalent. If the tube measurement indicates an H₂S content greater than 150 ppm_v, the permittee shall measure the total sulfur content of the gaseous fuel within one week of the tube measurement in accordance with ASTM-D1072 or a District-approved equivalent method.
 - (iii) The high heating value (HHV) of the fuel gas (Btu/scf) shall be measured annually in accordance with ASTM D-3588 or a District-approved method. Records shall be kept on site and made available for inspection by the District upon request
- (d) Recordkeeping: The following record keeping conditions apply to the external combustion equipment items listed above:
 - (i) All records required by the District approved *Fuel Use Monitoring Plan*.
 - (ii) The quarterly hydrogen sulfide measurements and total sulfur measurements of the fuel gas.
 - (iii) The high heating value of the fuel gas.
 - (iv) Source test reports for all District-required stack emission tests.
 - (v) A copy of the Rule 361 Non-Operational Test Firing log.
- (e) Reporting: On a semi-annual basis, a report detailing the previous six month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit. (*Re: District*
- (f) The permittee shall submit for District approval a revised *Fuel Gas Monitoring Plan* within 60-days of the final issuance of this permit which corrects the fuel use monitoring and recordkeeping procedures for units operating under the Default Rating Method. Units operating under the Default Rating Method shall report the volume of natural gas (in units of standard cubic feet) as the permitted annual heat input limit for the unit (Btu/year) divided by the District-approved heating value of the fuel (Btu/scf) with no reduction in reported fuel usage due to non-operation of the unit. All recordkeeping and reporting procedures shall be revised accordingly. The plan shall be implemented upon District approval of the revised plan.

C.2 **Storage Tanks.** The following equipment are included in this emissions category:

EQ Device No.	Name
TANKS	
110246	Crude Oil Storage Tank (Tank #87)
008492	Crude Oil Storage Tank (Tank #88)
003340	Crude Oil Storage Tank (Tank #89)
107889	Wash Tank
388806	Wastewater Tank

- (a) **Emission Limits:** Mass emissions from the equipment listed in this permit condition shall not exceed the emission limits listed in Tables 5.1-3 and 5.1-4. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.
- (b) **Operational Limits:** All process operations from the tanks listed in this section shall meet the requirements of District Rule 325, Sections D, E, F and G. Compliance shall be assessed through the monitoring, recordkeeping and reporting conditions in this permit and facility inspections. In addition, the following shall apply:

- (i) **Tank Throughput Limits.** The following tank throughput limitation shall apply:

Oil Production ^(a) 2,000 barrels per day

^(a) Throughputs calculated as monthly production divided by the number of producing days.

- (ii) **Facility Throughput Limits.** The following tank throughput limits shall apply:

Oil Production ^(a) 2,000 barrels per day
 Gas Production ^(a) 773,000 scf/day

^(a)Throughputs calculated as monthly production divided by the number of producing days

- (iii) **Vapor Recovery Unit.** Each tank shall be connected to a properly operating vapor recovery unit (VRU). The VRU shall be in operation when the equipment connected to the VRU system is in use. The VRU includes associated valves, fittings, and flanges. The VRU shall be maintained and operated to minimize the release of emissions from all systems connected to the VRU and shall meet the requirements of Rule 325.

(c) **Monitoring:** The permitted equipment is subject to the following monitoring requirements:

- (i) The volume of crude oil tank throughput (bbls) and produced gas (scf) from this facility shall be measured by a calibrated meter or through use of a District-approved alternate method. The meter shall be calibrated according to manufacturer's specifications and the calibration records shall be made available to the District upon request.
- (ii) On an annual basis the API gravity and true vapor pressure (TVP) shall be measured by using ASTM method D 323-82 (if the API gravity is equal to or greater than 20 degrees) or the HOST Method (if the API gravity is below 20 degrees). The true vapor pressure shall be based on the maximum expected temperature of the crude oil.

If ASTM D323-82 applies, the TVP shall be calculated from the Reid vapor pressure in accordance with API Bulletin 2518, or equivalent Reid/true vapor pressure correlation. The true vapor pressure shall be based on the maximum expected operating temperature of the storage tank. Sampling of crude oil for the vapor pressure measurement shall be completed per the *Crude Oil Sampling* condition of this permit.

(d) **Recordkeeping:** The following record keeping conditions apply:

- (i) The volume of total crude oil throughput each month and the number of days that oil was produced.
- (ii) The volume of gas produced each month (scf) and the number of days that gas was produced.
- (iii) API gravity and TVP of the crude oil.

(e) **Reporting:** On a semi-annual basis, a report detailing the previous six month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit. (*Re: District Rule 1303, 40 CFR 70.6*)

C.3 **Production Flare.** The following equipment are included in this emissions unit category:

District Device ID #	Description
003344	17.500 MMBtu/hr equipped with an automatic ignition system.

- (a) **Emission Limits:** Mass emissions from the flare shall not exceed the emission limits listed Tables 5.1-3 and 5.1-4 of this permit. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.
- (b) **Operational Limits:** All process operations from the equipment listed in this section shall meet the requirements of District Rule 359. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping and reporting conditions in this permit.

- (i) The average daily and annual heat input limits to the flare shall not exceed the values listed below. These limits are based on the design rating of the flare and the values listed in the permit application. Unless otherwise designated by the Control Officer, the following fuel heat content shall be used for determining compliance: Natural gas = 1,050 Btu/scf.

Combustion Unit	MMBtu/hr	MMBtu/day	MMBtu/yr
Flare	17.500	420.000	153,300.000

- (ii) The flare outlet shall be equipped with an automatic ignition system, a pilot-light and a pilot light gas source.
- (iii) The flare shall operate in compliance with the applicable sections of Rule 359 at all times when combustible gases are vented to the flare and with the District-approved *Flare Gas Metering Plan*. Sierra Resources shall submit for District approval a *Flare Gas Metering Plan* within 60-days of the final issuance of this permit. The flare meter shall be installed and this plan shall be implemented within 60-days of plan approval. See condition 9C.3(c)(i) below for plan requirements.
- (iv) Total sulfur content (calculated as H₂S at standard conditions, 60° F and 14.7 psia) of the gas flared shall not exceed 9.43 gr/100scf (150 ppmvd as H₂S at standard conditions).
- (c) **Monitoring:** The following monitoring requirements shall apply:
- (i) The production flare shall be equipped with dedicated District-approved electronic flow meter that will monitor and continuously record the daily and annual volume (scf) of produced gas (including pilot gas) combusted in the unit. The fuel meter shall be non-resettable, totalizing, and temperature and pressure corrected. The fuel meter shall be accurate to within five percent (5%) of the full scale reading. The fuel meter shall be calibrated at least every 12 months in accordance with the fuel meter manufacturer's recommendations and written procedures.
- (ii) The presence of the flame in the flare pilot shall be continuously monitored using a thermocouple or an equivalent device that detects the presence of a flame.
- (iii) The H₂S content of the flare gas shall be measured on a quarterly basis using colorimetric gas detection tubes or a District-approved equivalent. If a quarterly measurement indicates an H₂S content greater than 120 ppm_v, the permittee shall measure the total sulfur content of the gaseous fuel within one week of the quarterly measurement in accordance with ASTM-D1072 or a District approved equivalent method.
- (d) **Recordkeeping:** The following recordkeeping conditions shall apply:
- (i) The volume of gas combusted in the flare (scf) each month and the number of days that the flare operated.

- (ii) The monthly measured hydrogen sulfide content and the annually measured total sulfur content, in units of ppmvd, of the flare gas.
- (iii) All records required by the Flare Gas Metering Plan.
- (e) **Reporting:** On a semi-annual basis, a report detailing the previous six month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit. [Re: District Rule 1303, 40 CFR 70.6].

C.4 **Fugitive Hydrocarbon Emissions Components.** The following equipment are included in this emissions unit category:

District Device No.	Equipment
003366	Component Leak-Paths in Hydrocarbon Service

- (a) **Emission Limits:** Mass emissions from fugitive components shall not exceed the emission limits listed Tables 5.1-3 and 5.1-4 of this permit. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.
- (b) **Operational Limits:** Operation of the equipment listed in this section shall conform to the requirements listed in District Rule 331.D and E. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping and reporting conditions in this permit. In addition, Sierra Resources shall meet the following requirements:
 - (i) **VRS Use.** The vapor recovery/gas collection (VRGC) system shall be in operation when the equipment connected to the VRGC system at the facility is in use. The VRGC system includes piping, valves, and flanges associated with the VRGC system. The VRGC system shall be maintained and operated to minimize the release of emissions from all systems, including pressure relief valves and gauge hatches.
 - (ii) **I&M Program.** The District-approved I&M Plan for this lease shall be implemented for the life of the project. The Plan, and any subsequent District approved revisions, is incorporated by reference as an enforceable part of this permit. An updated Fugitive Emissions Inspection and Maintenance Plan must be submitted to the District for review and approval within one calendar quarter whenever there is a change in the component list or diagrams.
 - (iii) **Venting.** All routine venting of hydrocarbons shall be routed to either a sales compressor, flare header, injection well or other District-approved control device.
 - (iv) **Component Leak-Path Count.** The total component and component leak-path counts (clps) associated with the tank subject to this permit shall not exceed the total clps listed in the latest fugitive I&M inventory by more than five-percent. This five-percent range is to allow for small differences due to component leak-path counting methods and does not authorize additional component leak-paths.

- (c) **Monitoring.** The equipment listed in this section are subject to all the monitoring requirements listed in District Rule 331.F. The test methods in Rule 331.H shall be used, when applicable.
- (d) **Recordkeeping.** All inspection and repair records shall be retained at the source for a minimum of five years. The equipment listed in this section are subject to all the recordkeeping requirements listed in District Rule 331.G.
- (e) **Reporting.** On a semi-annual basis, a report detailing the previous six-month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit. [Re: ATC 8837, District Rules 331 and 1303, 40 CFR 70.6]

C.5 **Well Cellars.** The following equipment are included in this emissions category:

Device No.	Equipment Name
006335	Well Cellars (633 sq. ft.)

- (a) **Emission Limits.** Mass emissions from well cellars shall not exceed the emission limits listed Tables 5.1-3 and 5.1-4 of this permit. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.
- (b) **Operational Limits.** All process operations from the equipment listed in this section shall meet the requirements of District Rule 344, including the following:
 - (i) A person shall not open any valve at the wellhead without using a portable container to catch and contain any organic liquid that would otherwise drop on the ground or into the well cellar. Such container shall be kept closed when not in use.
 - (ii) Immediately before a well is steamed or after a well head is steam cleaned, the well cellar in which it is located shall be pumped out.
 - (iii) Neither of the following conditions shall occur unless the owner or operator discovered the condition and the well cellar is pumped within 7-days of discovery:
 - (a) liquid depth exceeding 50-percent of the depth of the well cellar.
 - (b) oil/petroleum depth exceeding 2-inches.

If a well cellar cannot be accessed by a vacuum truck due to muddy conditions, the well cellar shall be pumped as soon as it becomes accessible.
- (c) **Monitoring.** Sierra Resources shall inspect the well cellars on a weekly basis to ensure that the liquid depth and the oil/petroleum depth does not exceed the limits in Rule 344.D.3.c.
- (d) **Recordkeeping.** The following information relating to detection of conditions requiring pumping of a well cellar as required in Section D.3.c shall be recorded for each detection:
 - (i) the date of the detection.
 - (ii) the name of the person and company performing the test or inspection.

- (iii) the date and time the well cellar is pumped.
- (e) **Reporting.** On a semi-annual basis, a report detailing the previous six-month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit.

C.6 **Crude Oil Loading Rack.** The following equipment are included in this emissions category:

District Device No.	Equipment Name
003342	Crude Oil Loading Rack

- (a) **Emission Limits:** Mass emissions from the loading rack shall not exceed the emission limits listed Tables 5.1-3 and 5.1-4 of this permit. Compliance with these limits shall be assessed through compliance with the monitoring, recordkeeping, and reporting conditions listed in this permit.
- (b) **Operational Restrictions:** The following operational restrictions shall apply:
 - (i) The following throughput limitations shall not be exceeded:

Truck Loading of Oil	<u>160</u> bbl/hour
Truck Loading of Oil	<u>320</u> bbl/day
Truck Loading of Oil	<u>365,000</u> bbl/year
 - (ii) The loading rack used to ship oil from the facility shall use bottom-loading and a vapor recovery system that prevents the vapors displaced during loading from being released into the atmosphere. The operator shall also use either a block and bleed valve system or other connectors with equivalent spill prevention characteristics. Additionally the operator shall use one of the following devices to prevent overfill:
 - a. A primary overfill protection system consisting of a preset fill meter with automatic flow shutoff and a secondary overfill protection system consisting of a liquid level sensor with the ability to signal high level to activate a control valve to shut off flow, or
 - b. A combination of overfill devices and/or procedures, submitted in writing to the Control Officer, that is at least as effective in preventing overfill spillage as the system in Condition C.4.b(ii)a District written approval must be obtained prior to implementing this option.
- (c) **Monitoring:** The volumes of oil (bbls) shipped from this facility shall be measured through the use of calibrated meters or through the use of an District-approved alternate method. The meters shall be calibrated according to manufacturer's specifications and the calibration records shall be made available to the District upon request.
- (d) **Recordkeeping:** The following records shall be maintained:

- (i) The dates of oil shipments from the loading rack and the total volume of oil (bbls) shipped on each day listed.
- (e) Reporting: On a semi-annual basis, a report detailing the previous six-month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit.

C.7 **Solvent Usage.** The following items are included in this emissions unit category: Photochemically reactive solvents, surface coatings and general solvents.

- (a) Emission Limits. The following solvent emission limits are federally-enforceable for the entire stationary source:

Solvent Type	lbs/hour	lbs/day
Photochemically Reactive	8 lbs/hour	40 lbs/day
Non-Photochemically Reactive	450 lbs/hour	3,000 lbs/day

- (b) Operational Limits. n/a.
- (c) Monitoring. n/a
- (d) Recordkeeping/Reporting. n/a.

C.8 **Source Testing.** The following source testing provisions shall apply:

- (a) Source testing shall be performed biennially using the month of October as the anniversary date. The permittee shall conduct source testing of air emissions and process parameters listed in Table 4.11.1 of this permit. More frequent source testing may be required if the equipment does not comply with permitted limitations or if other compliance problems, as determined by the District, occur.
- (b) The permittee shall submit a written source test plan to the District for approval at least thirty (30) days prior to initiation of each source test. The source test plan shall be prepared consistent with the District's Source Test Procedures Manual (revised May 1990 and any subsequent revisions). The permittee shall obtain written District approval of the source test plan prior to commencement of source testing. The District shall be notified at least ten (10) calendar days prior to the start of source testing activity to arrange for a mutually agreeable source test date when District personnel may observe the test.
- (c) Source test results shall be submitted to the District within forty-five (45) calendar days following the date of source test completion and shall be consistent with the requirements approved within the source test plan. Source test results shall document the permittee's compliance status with BACT requirements, mass emission rates in Table 1 and applicable permit conditions, rules and NSPS (if applicable). All District costs associated with the review and approval of all plans and reports and the witnessing of tests shall be paid by the permittee as provided for by District Rule 210.
- (d) A source test for an item of equipment shall be performed on the scheduled day of testing (the test day mutually agreed to) unless circumstances beyond the control of the operator

prevent completion of the test on the scheduled day. Such circumstances include mechanical malfunction of the equipment to be tested, malfunction of the source test equipment, delays in source test contractor arrival and/or set-up, or unsafe conditions on site. Except in cases of an emergency, the operator shall seek and obtain District approval before deferring or discontinuing a scheduled test or performing maintenance on the equipment item on the scheduled test day. If the test cannot be completed on the scheduled day, then the test shall be rescheduled for another time with prior authorization by the District. Once the sample probe has been inserted into the exhaust stream of the equipment unit to be tested (or extraction of the sample has begun), the test shall proceed in accordance with the approved source test plan. In no case shall a test run be aborted except in the case of an emergency or unless approval is first obtained from the District. Failing to perform the source test of an equipment item on the scheduled test day without a valid reason and without the District's authorization shall constitute a violation of this permit. If a test is postponed due to an emergency, written documentation of the emergency event shall be submitted to the District by the close of the business day following the scheduled test day.

The timelines in (a), (b), and (c) above may be extended for good cause provided a written request is submitted to the District at least three (3) days in advance of the deadline, and approval for the extension is granted by the District

- C.9 **Equipment Maintenance.** The equipment listed in this permit shall be properly maintained and kept in good condition at all times. The equipment manufacturer's maintenance manual, maintenance procedures and/or maintenance checklists (if any) shall be kept on site.
- C.10 **Equipment Identification.** Identifying tag(s) or name plate(s) shall be displayed on the equipment to show manufacturer, model number, and serial number. The tag(s) or plate(s) shall be affixed to the equipment in a permanent and conspicuous position.
- C.11 **Recordkeeping.** Sierra Resources shall maintain all records and logs required by this permit or any applicable federal rule or regulation for a minimum of five calendar years from the date of information collection and log entry at the lease. These records or logs shall be readily accessible and be made available to the District upon request.
[Re: 40 CFR 70.6, District Rule 1303]
- C.12 **Requirements for Produced Gas.** The emissions of produced gas shall be controlled at all times using a properly maintained and operated system that directs all produced gas, except gas used in a tank battery vapor recovery system, to one of the following: (a) a system handling gas for fuel, sale, or underground injection; or (b) a flare that combusts reactive organic compounds; or (c) a device with an ROC vapor removal efficiency of at least 90-percent by weight. The provisions of this condition shall not apply to wells which are undergoing routine maintenance. *[Re: District Rule 325]*
- C.13 **Crude Oil Sampling.** Samples of crude oil shall be obtained from the initial tank, or from an active flow line into the tank, provided that there is an active flow of crude oil into the tank. Samples shall be taken from other tanks if requested in writing by the District.
- C.14 **Semi-Annual Monitoring/Compliance Verification Reports.** Sierra Resources shall submit a report to the District every six-months to verify compliance with the emission limits and other requirements of this permit. The reporting periods shall be each half of the calendar year, e.g.,

January through June for the first half of the year. A paper copy, as well as, a complete PDF electronic copy of these reports, shall be submitted by September 1st and March 1st, respectively, each year, and shall be in a format approved by the District. All logs and other basic source data not included in the report shall be available to the District upon request. The second report shall also include an annual report for the prior four quarters. The report shall include the following information:

(a) *Heater Treater and Boiler*

- (i) All records required by the District approved *Fuel Use Monitoring Plan*.
- (ii) The quarterly hydrogen sulfide measurements and total sulfur measurements of the fuel gas.
- (iii) The high heating value of the fuel gas.
- (iv) Source test reports for all District-required stack emission tests.
- (v) A copy of the Rule 361 Non-Operational Test Firing log.

(b) *Storage Tanks*

- (i) The volume of oil produced each month and the number of days that oil was produced.
- (ii) The volume of gas produced each month (scf) and the number of days that gas was produced.
- (iii) API gravity and TVP of the crude oil.

(c) *Production Flare*

- (i) The volume of gas combusted in the flare (scf) each month and the number of days the flare operated each month.
- (ii) The monthly measured hydrogen sulfide content and the annually measured total sulfur content, in units of ppmvd, of the flare gas.
- (iii) Flare meter calibration and maintenance records.

(d) *Rule 331 fugitive hydrocarbon I&M program data:*

- (i) inspection summary.
- (ii) record of leaking components.
- (iii) record of leaks from critical components.

- (iv) record of leaks from components that incur five repair actions within a continuous 12-month period.
 - (v) record of component repair actions including dates of component re-inspections.
 - (e) *Loading Rack*
 - (i) The dates of oil shipments from the loading rack and the total volume of oil (bbls) shipped on each day listed.
 - (g) *Solvents*
 - (i) On a monthly basis the amount of surface coating/solvent used field-wide in the Lompoc Oilfield; the percentage of ROC by weight (as applied); the surface coating/solvent density; the amount of solvent reclaimed; whether the surface coating/solvent is photochemically reactive; and, the resulting emissions of ROC and photochemically reactive surface coatings/solvents to the atmosphere in units of pounds per month.
- C.15 **Documents Incorporated by Reference.** The documents listed below and any District approved updates thereof, are incorporated herein and shall have the full force and effect of a permit condition of this permit. These documents shall be implemented for the life of the project and shall be made available to District inspection staff upon request.
- *Fugitive Hydrocarbon Inspection and Maintenance Plan (July 2017)*
 - *Flare Metering Plan (approved December 19, 2018)*
 - *Revised Fuel Gas Use Plan (to be submitted within 60 days of final permit issuance)*
- C.16 **External Combustion Units - Permits Required.**
- (a) An ATC/PTO permit shall be obtained prior to installation of any grouping of Rule 360 applicable boilers or hot water heaters whose combined system design heat input rating exceeds 2.000 MMBtu/hr.
 - (b) An ATC permit shall be obtained prior to installation, replacement, or modification of any existing Rule 361 applicable boiler or water heater rated over 2.000 MMBtu/hr. An ATC shall be obtained for any size boiler or water heater if the unit is not fired on natural gas or propane.
- C.17 **Compliance with Rule 346.** Equipment shall not be used to transfer organic liquids into any organic liquid cargo vessel unless the equipment is in full compliance with District Rule 346.
- C.18 **Compliance with Rule 359.** The permittee shall comply with the applicable requirements of District Rule 359: *Flares and Thermal Oxidizers* for each flare subject to this permit.

9.D ***District-Only Conditions***

The following section lists permit conditions that are not federally-enforceable (i.e., not enforceable by the USEPA or the public). However, these conditions are enforceable by the District and the State of California. These conditions have been determined as being necessary to ensure that operation of the facility complies with all applicable local and state air quality rules, regulations and laws. Failure to comply with any of these conditions shall be a violation of District Rule 206, this permit, as well as any applicable section of the California Health & Safety Code.

D.1 **Solvent Usage.** The following condition shall apply:

- (a) Emission Limits. Mass emissions from the tank heater shall not exceed the emission limits listed in Tables 5.1-3 and 5.1-4. Compliance with this condition shall be based on the monitoring, recordkeeping and reporting conditions in this permit.
- (b) Operational Limits: Use of solvents for cleaning/degreasing shall conform to the requirements of District Rules 317, 322, 323 and 324. Compliance with these rules shall be assessed through compliance with the monitoring, recordkeeping and reporting conditions in this permit and facility inspections.
 - (i) *Containers.* Vessels or containers used for storing materials containing organic solvents shall be kept closed unless adding to or removing material from the vessel or container.
 - (ii) *Materials.* All materials that have been soaked with cleanup solvents shall be stored, when not in use, in closed containers that are equipped with tight seals.
 - (iii) *Solvent Leaks.* Solvent leaks shall be minimized to the maximum extent feasible or the solvent shall be removed to a sealed container and the equipment taken out of service until repaired. A solvent leak is defined as either the flow of three liquid drops per minute or a discernible continuous flow of solvent.
 - (iv) *Reclamation Plan.* Sierra Resources may submit a Plan to the District for the disposal of any reclaimed solvent. If the Plan is approved by the District, all solvent disposed of pursuant to the Plan will not be assumed to have evaporated as emissions into the air and, therefore, will not be counted as emissions from the source. Sierra Resources shall obtain District approval of the procedures used for such a disposal Plan. The Plan shall detail all procedures used for collecting, storing and transporting the reclaimed solvent. Further, the ultimate fate of these reclaimed solvents must be stated in the Plan.
- (c) Monitoring. n/a.
- (d) Recordkeeping. Sierra Resources shall record in a log the following on a monthly basis for each solvent used: amount used; the percentage of ROC by weight (as applied); the solvent density; the amount of solvent reclaimed for District-approved disposal; whether the solvent is photochemically reactive; and, the resulting emissions to the atmosphere in units of pounds per month and pounds per day. Product sheets (MSDS or equivalent) detailing

the constituents of all solvents shall be maintained in a manner readily accessible to District inspection.

- (e) **Reporting.** On a semi-annual basis, a report detailing the previous six-month's activities shall be provided to the District. The report must list all data required by the *Semi-Annual Compliance Verification Reports* condition of this permit. [Re: 40 CFR 70.6, District Rules 317, 322,323, 324]

D.2 Greenhouse Gas Emission Standards for Crude Oil and Natural Gas Facilities. The equipment permitted herein shall be operated in compliance with the California Greenhouse Gas Emission Standards for Crude Oil and Natural Gas Facilities regulation (CCR Title 17, Section 95665 *et. Seq.*).

D.3 CARB GHG Regulation Recordkeeping. The permittee shall maintain at least 5 years of records that document the following:

- (a) The number of crude oil or natural gas wells at the facility.
- (b) A list identifying all pressure vessels, tanks, separators, sumps, and ponds at the facility, including the size of each tank and separator in units of barrels.
- (c) The annual crude oil, natural gas, and produced water throughput of the facility.
- (d) A list identifying all reciprocating and centrifugal natural gas compressors at the facility.
- (e) A count of all natural gas powered pneumatic devices and pumps at the facility.

A copy of the *Best Practices Management Plan* designed to limit methane emissions from circulation tanks, if applicable.

D.4 CARB GHG Regulation Reporting. The permittee shall report all throughput data and any updates to the information recorded pursuant to the *CARB GHG Regulation Recordkeeping* Condition above using District Annual Report Form ENF-108.

Air Pollution Control Officer

Date

NOTES:

- (a) This permit supersedes PTO 15001, PTO 14762, PTO 15220 and PTO 15315
- (b) Permit Reevaluation Due Date: August 2024

\\sbcapcd.org\shares\groups\engr\wp\oil&gas\gsd\ssid 02638 - purisima hills llc - blair lease\03777 barham boyne lease\pt-70 reeval 15001-r1\draft pt70 pto 15001 r1 - 09-14-2021.docx

10.0 Attachments

10.1 Emission Calculation Documentation

10.2 Emission Calculation Spreadsheets

10.3 IDS Database Emission Tables

10.4 Equipment List

10.5 Well List

10.6 Insignificant Activities

10.7 Fee Statement

10.1 Emission Calculation Documentation

Sierra Resources Barham/Boyne Lease

This attachment contains all relevant emission calculation documentation used for the emission tables in Section 5. Refer to Section 4 for the general equations. Detailed calculation spreadsheets are attached as Attachment 10.2.

Reference A - External Combustion Equipment

- The maximum operating schedule is in units of hours
- All heat input ratings based on burner nameplate and manufacturer data (HHV based)
- All emission calculations based on heat input rating (HHV based)
- PM_{10} to PM ratio = 1.0 (ref: USEPA AP-42, Table 1.4-1)
- The emission factors are based on Rule 361 Table 1 for NO_x and CO; USEPA AP-42 (ref: Table 1.4-2, July 1998) for ROC, PM, PM_{10} and $PM_{2.5}$, and mass balance for Sox.
Emission factors for SO₂ are based on mass balance:
$$SO_x \text{ (as SO}_2\text{)} = (0.169) \times (\text{ppmv S}) \div (\text{HHV}) \text{ [units = lb/MMBtu]}$$
- Emission calculations are based upon operations at maximum load.

Reference B - Petroleum Storage Tanks

- The hourly/daily/annual emissions for the petroleum storage tanks is based on USEPA AP-42 Chapter 7, Liquid Storage Tanks (5th Edition, 2/96)

Reference C - Wastewater Tanks

- The maximum operating schedule is in units of hours
- Emission calculation methodology based on the CARB/KVB report *Emission Characteristics of Crude Oil Production Operations in California (1/83)*
- Calculations are based on surface area of emissions noted in the inspector's report
- The THC Speciation is based on CARB profiles # 529, 530, 531, 532; the ROC/TOC ratio is based on the District's guideline "*VOC/ROC Emission Factors and Reactivities for Common Source Types*" Table dated 07/13/98 (version 1.1).

Reference D - Components Emitting Fugitive ROCs

- Emission factors for clps associated with PTO 14856 are based on the *District P&P 6100.061* guidelines. Emissions from all other clps are included in the CARB/KVB report *Emission Characteristics of Crude Oil Production Operations in California (1/83)* emissions calculation spreadsheet. (See Reference C above)
- An 80% reduction in fugitive emissions was assumed due to the implementation of a fugitive inspection and maintenance plan pursuant to Rule 331.

Reference E - Production Flare

- NO_x and CO emission factors based on USEPA AP-42, Table 11.5-1 (9/91)
- ROC emission factor based on the District 2016 Flare Study
- PM emission factor based on District Flare Study - Phase I Report, Table 3.1.1 (7/91)
- SO_x emissions based on mass balance

$$\text{SO}_x \text{ (as SO}_2\text{)} = (0.169) \times (\text{ppmv S}) / (\text{HHV})$$

Reference F - Loading Rack

- Calculations based on District Loading Rack Emission Calculation Spreadsheet (ver3.0).

Reference G - Solvents

- All solvents not used to thin surface coatings are included in this equipment category
- Annual emission rates per pt70 permit application
- Daily and hourly emissions based on the Rule 317

Reference H - Greenhouse Gases

- GHG emissions from combustion sources are calculated using emission factors found in Tables C-1 and C-2 of 40 CFR Part 98 and global warming potentials found in Table A-1 of 40 CFR Part 98. CO₂ equivalent emission factors are calculated for CO₂, CH₄, and N₂O individually then summed to calculate a total CO₂e emission factor. Annual CO₂e emission totals are presented in short tons.

For natural gas combustion the emission factor is:

(53.06 kg CO₂/MMBtu) (2.2046 lb/kg) = 116.97 lb CO₂/MMBtu

(0.001 kg CH₄/MMBtu) (2.2046 lb/kg)(25 lb CO₂e/lb CH₄) = 0.055 lb CO₂e/MMBtu

(0.0001 kg N₂O/MMBtu) (2.2046 lb/kg)(298 lb CO₂e/lb N₂O) = 0.066 lb CO₂e/MMBtu

Total CO₂e/MMBtu = 116.89 + 0.046 + 0.068 = 117.10 lb CO₂e/MMBtu

10.2 Emission Calculation Spreadsheets

FIXED ROOF TANK EMISSION CALCULATIONS (Ver. 4.0)

Attachment: A-1 Crude Storage Tank Emission Calculations
 Permit Number: PTO 15001-R1
 Facility: Barham/Boyne Lease

Basic Input Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Liquid Type.....	Crude Oil	Permit Application
Liquid TVP.....	2.7	Permit Application
If TVP is entered, enter TVP temperature (°F).....	99	Permit Application
Is the tank heated (Yes or No)?.....	no	Permit Application
If tank is heated, enter temperature (°F).....	0	Permit Application
Is tanked to a VRS (Yes or No)?.....	yes	Permit Application
Is this a wash tank (Yes or No)?.....	no	Permit Application
Will flashing losses occur (Yes or No)?.....	no	Permit Application
Breather vent pressure setting range (psi).....	0.06	Permit Application (default of 0.06 psi)

Tank Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Diameter (feet).....	21.1	Permit Application
Capacity (barrels).....	1,500	Permit Application
Capacity (gallons).....	63,000	Calculated Value
Roof Type (Enter C if Conical, or D if Dome Roof).....	c	Permit Application
Shell Height (feet).....	16	Permit Application
Roof Height.....	1	Permit Application (default of 1 foot)
Average Liquid Height (feet).....	8	Calculated Value
Tank Paint Color.....	Spec Aluminum	Permit Application
Condition (Enter 1 if Good, or 2 if Poor).....	1	Permit Application (default of 0.06 psi)
Upstream pressure (psi).....	0	Permit Application (0 psi when no flashing losses occur)

Liquid Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Maximum Daily Throughput (barrels per day).....	2000	Permit Application
Maximum Annual Throughput (gallons).....	3.066E+07	Calculated Value
RVP (psi).....	2.6176	RVP Matrix
API Gravity (°).....	20	Permit Application

Vapor Recovery System Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Vapor Recovery System Long Term Efficiency.....	95.00%	SBCAPCD
Vapor Recovery System Short Term Efficiency.....	95.00%	SBCAPCD

Tank ROC Potential to Emit

	Uncontrolled Potential to Emit		Controlled Potential to Emit	
	lb/day	TPY	lb/day	TPY
Breathing Losses	1.78	0.33	0.14	0.03
Working Losses	19.25	3.51	1.07	0.19
Flashing Losses	0.00	0.00	0.00	0.00
Total	21.04	3.84	1.21	0.22

Processed By: JJM

Date: September 2021

FIXED ROOF TANK EMISSION CALCULATIONS (Ver. 4.0)

Attachment: A-2 - Wash Tank Emission Calculations
 Permit Number: PTO 15001-R1
 Facility: Barham/Boyne Lease

Basic Input Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Liquid Type.....	Crude Oil	Permit Application
Liquid TVP.....	2.7	Permit Application
If TVP is entered, enter TVP temperature (°F).....	99	Permit Application
Is the tank heated (Yes or No)?.....	no	Permit Application
If tank is heated, enter temperature (°F).....		Permit Application
Is tanked to a VRS (Yes or No)?.....	yes	Permit Application
Is this a wash tank (Yes or No)?.....	yes	Permit Application
Will flashing losses occur (Yes or No)?.....	yes	Permit Application
Breather vent pressure setting range (psi).....	0.06	Permit Application (default of 0.06 psi)

Tank Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Diameter (feet).....	21.14	Permit Application
Capacity (barrels).....	1,500	Permit Application
Capacity (gallons).....	63,000	Calculated Value
Roof Type (Enter C if Conical, or D if Dome Roof).....	c	Permit Application
Shell Height (feet).....	24	Permit Application
Roof Height.....	1	Permit Application (default of 1 foot)
Average Liquid Height (feet).....	23	Calculated Value
Tank Paint Color.....	Spec Aluminum	Permit Application
Condition (Enter 1 if Good, or 2 if Poor).....	1	Permit Application (default of 0.06 psi)
Upstream pressure (psi).....	0.06	Permit Application (0 psi when no flashing losses occur)

Liquid Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Maximum Daily Throughput (barrels per day).....	2000	Permit Application
Maximum Annual Throughput (gallons).....	3.066E+07	Calculated Value
RVP (psi).....	2.6176	RVP Matrix
API Gravity (°).....	20	Permit Application

Vapor Recovery System Data

<u>Information</u>	<u>Value</u>	<u>Reference</u>
Vapor Recovery System Long Term Efficiency.....	95.00%	SBCAPCD
Vapor Recovery System Short Term Efficiency.....	95.00%	SBCAPCD

Tank ROC Potential to Emit

	Uncontrolled Potential to Emit		Controlled Potential to Emit	
	lb/day	TPY	lb/day	TPY
Breathing Losses	0.03	0.63	0.00	0.01
Working Losses	0.00	0.00	0.00	0.00
Flashing Losses	0.00	0.00	0.00	0.00
Total	0.03	0.63	0.00	0.01

Processed By: JJM

Date: September 2021

BOILER AND STEAM GENERATOR EMISSION CALCULATIONS (Ver. 7.0)

Attachment: A-3 Boiler Emission Calculations
Permit Number: PTO 15001-R1
Facility: Barham/Boyne

Heater Input Data

<u>Information</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Maximum Hourly Heat Input.....	3.500	MMBtu/hr	Permit Application
Daily Operating Schedule.....	24	hrs/day	Permit Application
Maximum Daily Heat Input.....	84.000	MMBtu/day	Calculated value
Yearly Load Factor (%).....	100	%	Permit Application
Maximum Annual Heat Input.....	30,660.000	MMBtu/yr	Calculated value

Fuel Information

<u>Information</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Fuel.....	PUC N.G.	N/A	Permit Application
High Heating Value.....	1,050	Btu/scf	Permit Application
Sulfur Content of Fuel.....	200.00	ppmvd as H ₂ S	Permit Application

Emission Factors

<u>Pollutant</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
NO _x Emission Factor.....	0.0360	lb/MMBtu	District Rule 361 (30 ppmvd @ 3% O ₂)
ROC Emission Factor.....	0.0054	lb/MMBtu	AP-42, Section 1.4
CO Emission Factor.....	0.2970	lb/MMBtu	District Rule 361 (400 ppmvd @ 3% O ₂)
SO _x Emission Factor.....	0.0342	lb/MMBtu	Mass Balance Calculation
PM Emission Factor	0.0075	lb/MMBtu	AP-42, Section 1.4
PM ₁₀ Emission Factor.....	0.0075	lb/MMBtu	AP-42, Section 1.4
PM _{2.5} Emission Factor.....	0.0075	lb/MMBtu	AP-42, Section 1.4

Boiler/Steam Generator Potential to Emit

Pollutant	lb/day	TPY
NO _x	3.02	0.55
ROC	0.45	0.08
CO	24.95	4.55
SO _x	2.87	0.52
PM	0.63	0.11
PM ₁₀	0.63	0.11
PM _{2.5}	0.63	0.11

Processed By: JJM

Date: September 2021

BOILER AND STEAM GENERATOR EMISSION CALCULATIONS (Ver. 7.0)

Attachment: A-4 Heater Treater Emission Calculations

Permit Number: PTO 15001-R1

Facility: Barham/Boyne

Heater Input Data

<u>Information</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Maximum Hourly Heat Input.....	1.370	MMBtu/hr	Permit Application
Daily Operating Schedule.....	24	hrs/day	Permit Application
Maximum Daily Heat Input.....	32.880	MMBtu/day	Calculated value
Yearly Load Factor (%).....	100	%	Permit Application
Maximum Annual Heat Input.....	12,001.200	MMBtu/yr	Calculated value

Fuel Information

<u>Information</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Fuel.....	PUC N.G.	N/A	Permit Application
High Heating Value.....	1,050	Btu/scf	Permit Application
Sulfur Content of Fuel.....	200.00	ppmvd as H ₂ S	Permit Application

Emission Factors

<u>Pollutant</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
NO _x Emission Factor.....	0.0980	lb/MMBtu	District Rule 360 (20 ppmvd @ 3% O ₂)
ROC Emission Factor.....	0.0054	lb/MMBtu	AP-42, Section 1.4
CO Emission Factor.....	0.0824	lb/MMBtu	District Rule 360 (400 ppmvd @ 3% O ₂)
SO _x Emission Factor.....	0.0342	lb/MMBtu	Mass Balance Calculation
PM Emission Factor	0.0075	lb/MMBtu	AP-42, Section 1.4
PM ₁₀ Emission Factor.....	0.0075	lb/MMBtu	AP-42, Section 1.4
PM _{2.5} Emission Factor.....	0.0075	lb/MMBtu	AP-42, Section 1.4

Boiler/Steam Generator Potential to Emit

Pollutant	lb/day	TPY
NO _x	3.22	0.59
ROC	0.18	0.03
CO	2.71	0.49
SO _x	1.12	0.21
PM	0.25	0.05
PM ₁₀	0.25	0.05
PM _{2.5}	0.25	0.05

Processed By: JJM

Date: September 2021

CRUDE OIL LOADING RACK EMISSION CALCULATIONS (Ver. 4.2)

Attachment: A-5
Permit Number: PTO 15001-R1
Facility: Barham/Boyne

Rack Information

<u>Rack Type</u>	<u>Enter X Where Appropriate</u>	<u>S Factor</u>
Submerged Loading of a Clean Cargo Tank		0.50
Submerged Loading: Dedicated Normal Service	X	0.60
Submerged Loading: Dedicated Vapor Balance Service		1.00
Splash Loading of a Clean Cargo Tank		1.45
Splash Loading: Dedicated Normal Service		1.45
Splash Loading: Dedicated Vapor Balance Service		1.00

Input Data

<u>Input data</u>	<u>Value</u>	<u>Reference</u>
Saturation Factor.....	0.60	Previous Input, AP-42 Table 4.4-1
Molecular Weight.....	50	SBCAPCD Default for Crude Oil
True Vapor Pressure (psia).....	2.700	Permit Application
Liquid Temperature (°F).....	99	Permit Application
Loading Rate (bbl/hr).....	160.00	Permit Application
Storage Capacity (bbl).....	320	Permit Application
Daily Production (bbl).....	1,000	Permit Application
Annual Production (bbl).....	365,000	Permit Application
Vapor Recovery Efficiency.....	0.95	SBCAPCD
ROC/THC Reactivity.....	0.885	SBCAPCD Default for Crude Oil

Loading Rate Calculations

<u>Calculated Information</u>	<u>Value</u>	<u>Reference</u>
Daily Hours Loading (hours).....	2.00	Calculated Value
Annual Hours Loading (hours).....	2,281.25	Calculated Value
Loading Loss (lb / 1,000 gals).....	1.8055	Calculated Value

Crude Oil Loading Rack ROC Potential to Emit

<u>Controlled Potential to Emit</u>	
lb/day	1.07
TPY	0.61

Processed By: JJM

Date: September 2021

OILFIELD FLARE EMISSION CALCULATIONS (Ver. 2.0)

Attachment: A-6
Permit Number: PTO 15001-R1
Facility: Barham/Boyne

Fuel Information

<u>Data</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Flare Throughput.....	0.400	MMscf/day	Permit Application
Gas Heat Content.....	1,050	Btu/scf	Permit Application
Sulfur Content.....	200	ppmv as H ₂ S	Permit Application

Heat Input Data

<u>Value</u>	<u>Units</u>	<u>Reference</u>
17.500	MMBtu/hour	Daily divided by 24 hr/day
420.000	MMBtu/day	Permit Application
153,300.000	MMBtu/year	Daily times 365 days/yr

Emission Factors

<u>Pollutant</u>	<u>lb/MMBtu</u>	<u>Reference</u>
NO _x	0.0680	AP-42, Table 13.5-1
ROC	0.2000	District February 2016 Flare Study
CO	0.3100	AP-42, Table 13.5-1
SO _x	0.0342	Mass Balance Calculation
PM	0.0200	SBCAPCD
PM ₁₀	0.0200	AP-42, Chapter 1.4
PM _{2.5}	0.0200	AP-42, Chapter 1.4

Flare Potential to Emit

Pollutant	lb/day	TPY
NO _x	28.56	5.21
ROC	84.00	15.33
CO	130.20	23.76
SO _x	14.37	2.62
PM	8.40	1.53
PM ₁₀	8.40	1.53
PM _{2.5}	8.40	1.53

Processed By: JJM

Date: September 2021

FUGITIVE HYDROCARBON EMISSION CALCULATIONS - CARB/KVB METHOD (Ver. 6.0)

Page 1 of 2

Attachment: A-7
 Permit Number: PTO 15001-R1
 Facility: Barham/Boyne

Input Data

<u>Facility Information</u>	<u>Value</u>	<u>Units</u>	<u>Reference</u>
Number of Active Wells at Facility.....	17	wells	Permit Application
Facility Gas Production.....		scf/day	Permit Application
Facility Dry Oil Production.....		bbls/day	Permit Application
Facility Gas to Oil Ratio (if > 500 then default to 501).....	386	scf/bbl	Permit Application
API Gravity.....	15	degrees API	Permit Application
Facility Model Number.....	2	dimensionless	User Input
No. of Steam Drive Wells with Control Vents.....	0	wells	Permit Application
No. of Steam Drive Wells with Uncontrolled Vents.....	0	wells	Permit Application
No. of Cyclic Steam Drive Wells with Control Vents.....	0	wells	Permit Application
No. of Cyclic Steam Drive Wells with Uncontrolled Vents.....	0	wells	Permit Application
Composite Valve and Fitting Emission Factor.....	1.3091	lb/day-well	Table Below

Emission Factor Based on Lease Model

Lease Model	Valve Without Ethane	Fitting Without Ethane	Composite Without Ethane	Units
1	1.4921	0.9947	2.4868	lbs/day-well
2	0.6999	0.6092	1.3091	lbs/day-well
3	0.0217	0.0673	0.0890	lbs/day-well
4	4.5090	2.1319	6.6409	lbs/day-well
5	0.8628	1.9424	2.8053	lbs/day-well
6	1.7079	2.5006	4.2085	lbs/day-well

Model #1: Number of wells on lease is less than 10 and the GOR is less than 500.

Model #2: Number of wells on lease is between 10 and 50 and the GOR is less than 500.

Model #3: Number of wells on lease is greater than 50 and the GOR is less than 500.

Model #4: Number of wells on lease is less than 10 and the GOR is greater than 500.

Model #5: Number of wells on lease is between 10 and 50 and the GOR is greater than 500.

Model #6: Number of wells on lease is greater than 50 and the GOR is greater than 500.

Reference: CARB speciation profiles numbers 529, 530, 531, 532

CARB KVB ROC Potential to Emit

Emission Source	lb/day	TPY
Valves and Fittings ^a	4.45	0.81
Sumps, Wastewater Tanks and Well Cellars ^b	18.09	3.30
Oil/Water Separators ^b	0.00	0.00
Pumps/Compressors/Well Heads ^a	0.28	0.05
Enhanced Oil Recovery Fields	0.00	0.00
Total ROC Potential to Emit^c	22.82	4.16

Notes:

- a. Emissions amount reflect an 80% reduction due to Rule 331 implementation.
- b. Emissions reflect control efficiencies where applicable.
- c. Due to rounding, the totals may not appear correct

Unit Type Emission Calculations*Pumps, Compressors, and Well Heads Uncontrolled Emission Calculations*

	Value	Units	Reference
Number of Wells	17	wells	Permit Application
Wellhead Emissions	0.1649	lb-ROC/day	Calculated Value
FHC from Pumps	0.0653	lb-ROC/day	Calculated Value
FHC from Compressors	1.1543	lb-ROC/day	Calculated Value
Total ROC Emissions	1.39	lb-ROC/day	Calculated Value

Well Cellars, Sumps, Covered Wastewater Tanks, and Oil/Water Separators

Separation Level	Heavy Oil Service	Light Oil Service	Units
Primary	0.0941	0.1380	lb ROC/ft ² -day
Secondary	0.0126	0.0180	lb ROC/ft ² -day
Tertiary	0.0058	0.0087	lb ROC/ft ² -day

WELL CELLARS			Level of Separation		
Equipment Type	Number	Total Area (ft ²)	Primary	Secondary	Tertiary
Well Cellars ^(a)	17	633	17.87		
				0.00	
					0.00
Daily ROC Emissions (lb/day)			17.87	0.00	0.00

Notes:

- a. A 70% reduction is applied for implementation of Rule 344 (Sumps, Pits, and Well Cellars).

COVERED WASTEWATER TANKS			Level of Separation		
Equipment Type	Number	Total Area (ft ²)	Primary	Secondary	Tertiary
Covered Wastewater Tank ^(a)	0	0	0.00		
	0	0		0.00	
	0	0			0.00
Daily ROC Emissions (lb/day)			0.00	0.00	0.00

Notes:

- a. A 85% reduction is applied.

COVERED WASTEWATER TANK WITH VAPOR RECOVERY			Level of Separation		
Equipment Type	Number	Total Area (ft ²)	Primary	Secondary	Tertiary
Covered Wastewater Tank with Vapor Recovery ^(a)	0	0	0.00		
	1	351		0.22	
	0	0			0.00
Daily ROC Emissions (lb/day)			0.00	0.22	0.00

Notes:

- a. A 95% reduction is applied.

OIL AND WATER SEPARATORS		Type		
Equipment Type	Total Throughput (MMgal)	Covered	Vapor Recovery	Open Top
Oil and Water Separators ^{(a)(b)}	0	0.00		
	0		0.00	
	0			0.00
Daily ROC Emissions (lb/day)		0.00	0.00	0.00

Notes:

- a. A 85% reduction is applied for covered, 85% for connected to vapor recovery, and 0% for open top.
b. Emission Factor of 560 lb-ROC/MMgal

10.3 IDS Database Emission Tables

Table 1
Permitted Potential to Emit (PPTE)

	NO _x	ROC	CO	SO _x	TSP	PM _{2.5/10}
PTO 15001 - Barham/Boyne Lease						
lb/day	34.81	112.12	157.86	18.36	9.34	9.34
tons/year	6.35	20.90	28.81	3.35	1.70	1.70

Table 2
Facility Potential to Emit (FPTE)

	NO _x	ROC	CO	SO _x	TSP	PM _{2.5/10}
PTO 15001 - Barham/Boyne Lease						
lb/day	34.81	112.12	157.86	18.36	9.34	9.34
tons/year	6.35	20.90	28.81	3.35	1.70	1.70

Table 3
Federal PtT-70 Facility Potential to Emit (PT 70 FPTE)

	NO _x	ROC	CO	SO _x	TSP	PM _{2.5/10}
PTO 15001 - Barham/Boyne Lease						
lbs/day	34.81	88.22	157.86	18.36	9.34	9.34
tons/year	6.35	16.13	28.81	3.35	1.70	1.70

Table 4
Stationary Source Total Potential to Emit

	NO _x	ROC	CO	SO _x	TSP	PM _{2.5/10}
lbs/day	370.79	598.67	1131.10	78.36	54.70	54.70
tons/year	67.66	110.41	206.43	14.30	9.98	9.98

10.4 Equipment List

PT-70/Reeval 15001 R1 / FID: 03777 Barham/Boyne Leases / SSID: 02638

A PERMITTED EQUIPMENT

1 Crude Oil Tank

<i>Device ID #</i>	110246	<i>Device Name</i>	Crude Oil Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1000.00 BBL
<i>Manufacturer</i>		<i>Operator ID</i>	Tank #87
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	Dimensions: 21.14 feet high by 16 feet high. Connected to the vapor recovery system.		

2 Crude Oil Tank

<i>Device ID #</i>	008492	<i>Device Name</i>	Crude Oil Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1000.00 BBL
<i>Manufacturer</i>		<i>Operator ID</i>	Tank #88
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	21.14' dia. by 16.0' h. Connected to vapor recovery system.		

3 Crude Oil Tank

<i>Device ID #</i>	003340	<i>Device Name</i>	Crude Oil Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1000.00 BBL
<i>Manufacturer</i>		<i>Operator ID</i>	Tank #89
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	21.14' dia. by 16.0'h. Connected to vapor recovery system.		

4 Wastewater Tank

<i>Device ID #</i>	388806	<i>Device Name</i>	Wastewater Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1000.00 BBL/Day
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>	1,000 bbl API 12B bolted tank; 21.4' dia. x 16.0 ' ht.		
<i>Description</i>			

5 Wash Tank

<i>Device ID #</i>	107889	<i>Device Name</i>	Wash Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1500.00 BBL
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>	21.14' diameter x 24.0' h feet high, connected to vapor recovery.		
<i>Description</i>			

6 O&G Wells, Cellars and Unassociated Valves & Flanges

6.1 Oil and Gas Wellheads

<i>Device ID #</i>	003338	<i>Device Name</i>	Oil and Gas Wellheads
<i>Rated Heat Input</i>		<i>Physical Size</i>	Total Wells
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>	Well designations: Boyne # 1 -9, Barham 6,7,8,9, 10 and 11 and Otec 1A.		
<i>Description</i>			

6.2 Well Cellars

<i>Device ID #</i>	006335	<i>Device Name</i>	Well Cellars
<i>Rated Heat Input</i>		<i>Physical Size</i>	882.00 Square Feet Cellar Area
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	Boyne well 1 has a 6ft by 6 ft cellar. Boyne wells 2 & 5 each have an 8 ft by 8 ft cellar. Boyne wells 3,4,6 & 7 each have an 8 ft diameter cellar. Boyne wells 1A, 8 & 9 each have a 6 ft diameter cellar. Barham wells 6-10 each have a 6 ft diameter cellar. Barham well 11 has an 8 ft diameter cellar.		

6.3 Valves & Fittings

<i>Device ID #</i>	003346	<i>Device Name</i>	Valves & Fittings
<i>Rated Heat Input</i>		<i>Physical Size</i>	14.00 Active Wells
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	Valves, fittings, and flanges not directly associated with other permitted equipment items, that emit fugitive hydrocarbons.		

7 Heater Treater

<i>Device ID #</i>	005144	<i>Device Name</i>	Heater Treater
<i>Rated Heat Input</i>	1.370 MMBtu/Hour	<i>Physical Size</i>	1.37 MMBtu/Hour
<i>Manufacturer</i>	National Tank Co.	<i>Operator ID</i>	
<i>Model</i>	B7513	<i>Serial Number</i>	11140-A
<i>Location Note</i>			
<i>Device Description</i>			

8 Boiler

Device ID #	110245	Device Name	Boiler
<i>Rated Heat Input</i>	3.500 MMBtu/Hour	<i>Operator ID</i>	
<i>Manufacturer</i>	Rite Engineering	<i>Serial Number</i>	07-30178
<i>Model</i>	350WG	<i>Rule 361 Status</i>	Existing
<i>Location Note</i>			
<i>Emission Control Basis</i>	Uncontrolled		
<i>Device Description</i>	Equipped with a Power Flame Low NOx Burner, Model LNICR3-G-25B, Serial #110623667. The heat from the boiler is used to aid the oil/water separation process. The boiler is fired exclusively on field gas.		

9 Crude Oil Loading Rack

Device ID #	003342	Device Name	Crude Oil Loading Rack
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device Description</i>	One grade level loading rack used to load crude oil into highway tanker trucks; connected to vapor recovery.		

10 Flare

Device ID #	003344	Device Name	Flare
<i>Rated Heat Input</i>	17.500 MMBtu/Hour	<i>Physical Size</i>	17.50 MMBtu/Hour
<i>Manufacturer</i>	Kaldair Indair	<i>Operator ID</i>	
<i>Model</i>	I-6-AS	<i>Serial Number</i>	53
<i>Location Note</i>			
<i>Device Description</i>	Continuous use flare equipped with electronic automatic pilot/ignitor (mfr: KEP, model: 100). Used to combust both vapors recovered from storage tanks and loading operations, as well as (produced) gas not used as fuel in heater treater or internal combustion engine(s), flared gas volume determined by: fuel meter (mfr: ITT Barton, model: 202) equipped with chart recorder. Flare heat input based on fuel heat content of 1,050 Btu/scf.		

11 Flare Gas Condensate Scrubber

<i>Device ID #</i>	104422	<i>Device Name</i>	Flare Gas Condensate Scrubber
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>	AB Southern	<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	2029202
<i>Location Note</i>			
<i>Device</i>	3.0' diameter. x 8.0' high.		
<i>Description</i>			

12 Vapor Recovery System

<i>Device ID #</i>	104423	<i>Device Name</i>	Vapor Recovery System
<i>Rated Heat Input</i>		<i>Physical Size</i>	15.00 Horsepower (Electric Motor)
<i>Manufacturer</i>	Ingersol Rand	<i>Operator ID</i>	
<i>Model</i>	Type 30	<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>	Vapors recovered by a compressor serving the following equipment with a recovery efficiency of 95% by weight: the 1,500 bbl wash tank, the two 1,000 bbl crude tanks, the 1,000 bbl wastewater tank and the crude loading rack.		
<i>Description</i>			
	The VRS compressor is driven by a 15 horsepower (hp) electric motor.		

13 Vapor Recovery Scrubber

<i>Device ID #</i>	104424	<i>Device Name</i>	Vapor Recovery Scrubber
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>	Wendland Manufacturing Company	<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	26980
<i>Location Note</i>			
<i>Device</i>	2.5' dia. by 4' high.		
<i>Description</i>			

14 Vapor Recovery Unit Compressor (Backup)

<i>Device ID #</i>	393050	<i>Device Name</i>	Vapor Recovery Unit Compressor (Backup)
<i>Rated Heat Input</i>		<i>Physical Size</i>	15.00 Brake Horsepower
<i>Manufacturer</i>	Ingersol Rand	<i>Operator ID</i>	
<i>Model</i>	Type 30	<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>			
<i>Description</i>			

15 Tank Bottoms Pump

<i>Device ID #</i>	104425	<i>Device Name</i>	Tank Bottoms Pump
<i>Rated Heat Input</i>		<i>Physical Size</i>	1.50 Horsepower (Electric Motor)
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Location Note</i>			
<i>Device</i>	Pump driven by a 1.5 hp electric motor.		
<i>Description</i>			

16 Fuel Gas Scrubber

<i>Device ID #</i>	104426	<i>Device Name</i>	Fuel Gas Scrubber
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>	Pressure Steel Tank Company	<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	PST No. A25307
<i>Location Note</i>			
<i>Device</i>	Scrubber serves the internal combustion engines. 2' dia. by 5' high.		
<i>Description</i>			

17 Oil & Gas Separator

<i>Device ID #</i>	108763	<i>Device Name</i>	Oil & Gas Separator
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>	Trico - Superior	<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	NB21
<i>Location Note</i>			
<i>Device</i>	6 feet in diameter by 24 feet high.		
<i>Description</i>			

B EXEMPT EQUIPMENT**1 Waste Water Loading Rack**

<i>Device ID #</i>	003343	<i>Device Name</i>	Waste Water Loading Rack
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Part 70 Insig?</i>	No	<i>District Rule Exemption:</i> 202.202 Unspecified Exemption	
<i>Location Note</i>			
<i>Device</i>	Connected to VRS.		
<i>Description</i>			

2 Heat Exchanger

<i>Device ID #</i>	388187	<i>Device Name</i>	Heat Exchanger
<i>Rated Heat Input</i>		<i>Physical Size</i>	
<i>Manufacturer</i>		<i>Operator ID</i>	
<i>Model</i>		<i>Serial Number</i>	
<i>Part 70 Insig?</i>	No	<i>District Rule Exemption:</i> 202.L.1 Heat Exchangers	
<i>Location Note</i>			
<i>Device</i>	Shell and tube heat exchanger. 10.0' long x 36.0" dia.		
<i>Description</i>			

E DE-PERMITTED EQUIPMENT

1 Waste Water Tank

<i>Device ID #</i>	003341	<i>Device Name</i>	Waste Water Tank
<i>Rated Heat Input</i>		<i>Physical Size</i>	1000.00 BBL
<i>Manufacturer</i>		<i>Operator ID</i>	4
<i>Model</i>	1626SD	<i>Serial Number</i>	
<i>Depermitted</i>		<i>Facility Transfer</i>	
<i>Device</i>	Bolted tank. Dia. 21.14' by 16.0' h. Connected to vapor recovery.		
<i>Description</i>			

Attachment 10.5. Permitted Wells

.

CA Well Results [Active Wells only]

County:Santa Barbara 083 Field:Barham Ranch Operator Code:S3525 Lease:H. P. Boyne

District	Operator Name	Field Name	API #	Lease Name	Well	Status	WellType	Township	Range	Base Meridian	Area Code	Area Name
3	Sierra Resources, Inc.	Barham Ranch	08322113	H. P. Boyne	1	A	OG	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322199	H. P. Boyne	2	A	OG	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322206	H. P. Boyne	3	A	OG	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322216	H. P. Boyne	4	A	OG	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322218	H. P. Boyne	5	A	OG	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322247	H. P. Boyne	6	A	OG	07N	32W	SB	03	La Laguna

District	Operator Name	Field Name	API #	Lease Name	Well	Status	WellType	Section	Township	Range	Base Meridian	Area Code	Area Name
3	Sierra Resources, Inc.	Barham Ranch	08322415	Barham	6	A	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322484	Barham	7	A	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322501	Barham	8	A	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322522	Barham	10	A	OG	11	07N	32W	SB	03	La Laguna
3	Sierra Resources, Inc.	Barham Ranch	08322579	Barham	9	A	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322697	Barham	11	A	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322815	Barham	12	N	OG	11	07N	32W	SB	06	Old

District	Operator Name	Field Name	API #	Lease Name	Well	Status	WellType	Section	Township	Range	Base Meridian	Area Code	Area Name
3	Sierra Resources, Inc.	Barham Ranch	08322416	Boyne	8	I	OG	12	07N	32W	SB	06	Old
3	Sierra Resources, Inc.	Barham Ranch	08322785	Boyne	10	A	OG	12	07N	32W	SB	06	Old

District	Operator Name	Field Name	API #	Lease Name	Well	Well Status	Pool WellType	Section	Township	Range	Base Meridian	Area Code	Area Name
3	Sierra Resources, Inc.	Barham Ranch	08322286	OTEC Boyne	1A	A	OG	11	07N	32W	SB	06	Old

District	Operator Name	Field Name	API #	Lease Name	Well	Well Status	Pool WellType	Section	Township	Range	Base Meridian	Area Code	Area Name
3	Sierra Resources, Inc.	Barham Ranch	08322380	Purisima Boyne	7	A	OG	12	07N	32W	SB	06	Old

10.6 Insignificant Activities (Stationary Source Totals)

1. Abrasive Blasting (0.05 TPY PM/PM_{2.5/10})
2. Lubricating Oil Storage (0.01 TPY ROC)
3. Various Oils Storage (0.01 TPY)
4. Solvents and Coatings (0.73 TPY ROC)

Attachment 10.7 Fee Statement



air pollution control district
SANTA BARBARA COUNTY

FEE STATEMENT
PT-70/Reeval No. 15001 - R1
FID: 03777 Barham/Boyne Leases / SSID: 02638

Device Fee

Device No.	Device Name	Fee Schedule	Qty of Fee Units	Fee per Unit	Fee Units	Max or Min. Fee Apply?	Number of Same Devices	Pro Rate Factor	Device Fee	Penalty Fee?	Fee Credit	Total Fee per Device
110246	Crude Oil Tank	A6	42.000	4.33	Per 1000 gallons	No	1	1.000	181.86	0.00	0.00	181.86
008492	Crude Oil Tank	A6	42.000	4.33	Per 1000 gallons	No	1	1.000	181.86	0.00	0.00	181.86
003340	Crude Oil Tank	A6	42.000	4.33	Per 1000 gallons	No	1	1.000	181.86	0.00	0.00	181.86
388806	Wastewater Tank	A6	42.000	4.33	Per 1000 gallons	No	1	0.496	90.20	0.00	0.00	90.20
107889	Wash Tank	A6	63.000	4.33	Per 1000 gallons	No	1	1.000	272.79	0.00	0.00	272.79
003338	Oil and Gas Wellheads	A1.a	1.000	75.49	Per equipment	No	17	1.000	1,283.33	0.00	0.00	1,283.33
003346	Valves & Fittings	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
005144	Heater Treater	A3	1.375	566.34	Per 1 million Btu input	No	1	1.000	778.72	0.00	0.00	778.72
110245	Boiler	A3	3.500	566.34	Per 1 million Btu input	No	1	1.000	1,982.19	0.00	0.00	1,982.19
003342	Crude Oil Loading Rack	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
104422	Flare Gas Condensate Scrubber	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
104423	Vapor Recovery System	A2	15.000	39.14	Per total rated hp	No	1	1.000	587.10	0.00	0.00	587.10
104424	Vapor Recovery Scrubber	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
393050	Vapor Recovery Unit Compressor (Backup)	A2	15.000	39.14	Per total rated hp	No	1	0.645	378.68	0.00	0.00	378.68
104425	Tank Bottoms Pump	A2	1.500	39.14	Per total rated hp	Min	1	1.000	75.00	0.00	0.00	75.00
104426	Fuel Gas Scrubber	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
108763	Oil & Gas Separator	A1.a	1.000	75.49	Per equipment	No	1	1.000	75.49	0.00	0.00	75.49
Device Fee Sub-Totals =									\$6,446.53	\$0.00	\$0.00	
Device Fee Total =												\$6,446.53

Permit Fee

Fee Based on Devices

\$6,446.53

Fee Statement Grand Total = \$6,446

Notes:

- (1) Fee Schedule Items are listed in District Rule 210, Fee Schedule "A".
- (2) The term "Units" refers to the unit of measure defined in the Fee Schedule.

